

12" Legend® Set

Mini-Light Bar



FEATURES

- 20-ft traditional cable
- Built-in flasher models include (10) selectable flash patterns
- Five-year warranty

APPROVALS

- SAE J845 Class 1

FS TECHNOLOGIES



A Complement to Any Warning Solution

The 12" Legend® Sets are an addition to Federal Signal's family of Legend® light bars. Built in the same low-profile, linear design as the full-length Legend light bars, the 12" Legend Sets provide a superior warning signal to promote work zone safety.

Packed with Technology to Keep you Safe

Through the Federal Signal Solaris® LED reflector technology, the 12" Legend Sets are engineered to significantly increase off-axis warning and maximize the LED light source to eliminate dark spots and to increase visibility while on the road and in work zones. In addition, the patented ROC (Reliable Onboard Circuitry™) technology is built to minimize potential failure points in the light bar. Wires, connectors, and assemblies have been replaced by PCB assemblies—reducing labor repair time and increasing the road time for work trucks.

Built for Versatility and Performance

Meeting SAE J845 Class 1 standards, the 12" Legend Sets are ideal for various applications, including DOT, municipal, utility, construction and Tow and Recovery vehicles. In addition, the Legend sets can be used as wing lights on large work truck applications, including rotator tow trucks and guzzler trucks. Build a complete warning system with other Legend light bars utilizing the Relay module.


HOW TO ORDER

LED Color Dome Color

A B G R W A C

12" SETS - FLAT MOUNT INCLUDED

- LGD12Z-00001 (10) Amber light heads, Clear domes, built-in flasher, set
- LGD12Z-00002 (10) Amber light heads, Clear domes, set

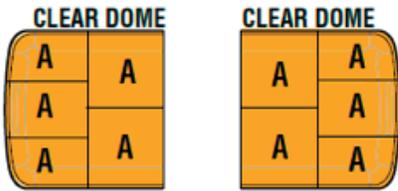

LGD12Z-00001
LGD12Z-00002

SPECIFICATIONS

CURRENT DRAW	2.5 A @ 12.8 Vdc
OPERATING VOLTAGE	12 Vdc
OPERATING TEMP	-22° to +149° F (-30° to +65° C)
FLASH PATTERNS	10

PHYSICAL SPECIFICATIONS

LENGTH	12.0 in (30.5 cm)
WIDTH	11.2 in (28.5 cm)
HEIGHT	2.5 in (64.0 cm)

SHIP WEIGHT

10.8 lb (4.9 kg)*

*Standard foot included

