



**NIGHTSPIRE™**

# MAXIMIZE WORK ZONE FUNCTIONALITY WITH AN INNOVATIVE LED SEARCH LIGHT

## NIGHTSPIRE™ SPECIFICATIONS

Light Technology	LED
Amp Draw	3.25 Amps Peak
Voltage	12 Vdc
Dome Color	Clear
Warranty	Five Years
<b>Dimensions</b>	
Permanent Mount	6.0 x 6.0 x 7.1 (in) 15.24 x 15.24 x 18.03 (cm)
Magnet Mount	5.19 x 5.19 x 6.94 (in) 13.03 x 13.03 x 17.62 (cm)
<b>Controller</b>	
Dimensions	5.09 x 1.12 x 1.80 (in) 12.9 x 2.85 x 4.5 (cm)
Batteries	[2] AAA (Included)
<b>Approval</b>	
	IP69K

## WIRELESS CONTROLLER



Tactile buttons  
for easy activation

Easy to grip design

Back-lit buttons  
when activated

Low maintenance,  
full-featured wireless  
controller  
(2 AAA batteries, included)

To learn more, visit [fedsig.com](https://fedsig.com)

2645 Federal Signal Drive, University Park, IL 60484  
T 800.264.3578 F 800.682.8022





# NIGHTSPIRE™

**ADJUSTABLE SPOT AND FLOOD LED LIGHT  
WITH WIRELESS CONTROL**






**NIGHTSPIRE™**

**INNOVATIVE.  
POWERFUL.  
RELIABLE.**




When safety is the number one priority for truck operators in a work zone — demand an innovative, powerful, and reliable spot and flood LED light.


From spotlight to floodlight capability, the **NightSpire™** provides 360-degrees of continuous rotation to direct light where it is needed. With IP69K housing, the NightSpire will withstand outside elements against field failures for added reliability.

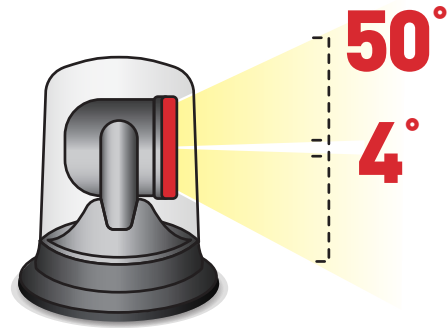

**FLOOD TO SPOT**  
Adjustable flood to spot capability  
Digitally controlled lens adjusts between  
50-degrees to 4-degrees

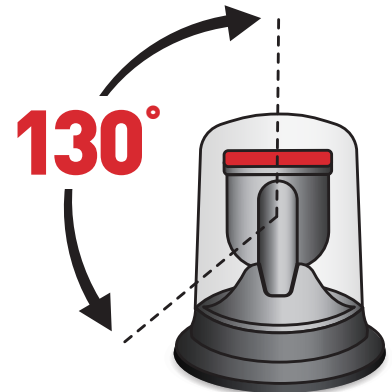

**TILT**  
130° of vertical  
tilt

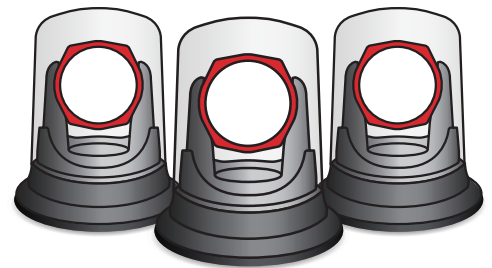


**MULTI-SELECT**  
Sync up to three lights  
with one controller.



## ROTATION

360° of Continuous Rotation

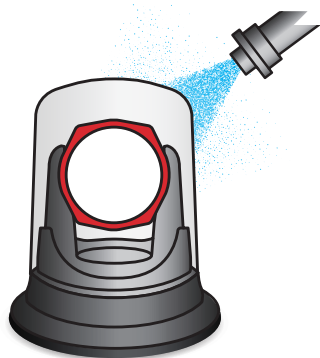

## IP69K

Maximum protection from dust & water. Pressure wash resistant.



## SUB-ZERO

Designed to operate in -40°C to +80°C environment.

# SPOT & FLOOD LED LIGHT BUILT FOR PERFORMANCE

- Adjustable spot to flood capability
- 360° of continuous rotation; 130° of vertical tilt
- Multi-select synchronization — Sync up to three lights with one controller
- IP69K — Maximum protection from dust and water
- Mounting options: Magnet Mount, Cigarette Plug and Permanent/1-inch pipe mount
- Designed to operate in -40°C to +80°C environments
- Wireless controller; Back-lit controller buttons when activated
- 3,100 raw lumen output
- 12 Vdc
- Five-year warranty

*Digitally controlled lens adjusts to floodlight at 50-degrees or a pinpoint spotlight at 4-degrees*

## SPOT LED LIGHT



## FLOOD LED LIGHT



## WIRELESS CONTROLLER

*Sync up to three lights with one controller. Back-lit buttons illuminate for ease of operation.*



## TWO BASE OPTIONS



Magnet Mount,  
Cigarette Plug



Permanent/ 1-inch  
pipe mount