25500660 A0 0820

### Safety Message to Installers of Warning Light Equipment

People's lives depend on your proper installation and servicing of Federal Signal products. It is important to read and follow all instructions shipped with this product and the original product. Listed below are some other important safety instructions and precautions you should follow:

- To properly install the lighting system, you must have a good understanding of automotive systems, along with proficiency in the installation and use of safety warning equipment.
- Do not install equipment or route wiring in the deployment path of an airbag.
- If a vehicle seat is temporarily removed, verify with the vehicle manufacturer if the seat needs to be recalibrated for proper airbag deployment.
- Frequently inspect the light system to ensure that it is operating properly and is securely attached to the vehicle.
- When drilling into a vehicle structure, ensure that both sides of the surface are clear of anything that could be damaged.
- · Refer to the instructions packed with related products for additional precautions and information.
- File these instructions in a safe place and refer to them when maintaining and/or reinstalling the product.
- Do not stare directly into the lights at a close range, or permanent damage to your eyesight may occur.

Failure to follow all safety precautions and instructions may result in property damage, serious injury, or death.

#### **SLB-SIL19ND Mounting Kit**

This publication has instructions for using the SLB-SIL19ND Mounting Kit to mount a CN SignalMaster™ or Latitude light head to the rear window of the Chevy Silverado 1500.

**NOTE:** For electrical installation instructions, refer to the installation and maintenance instructions packed with the light head.

### Unpacking the Kit

After unpacking the kit, inspect it for damage that may have occurred in transit. If it has been damaged, do not attempt to install or operate it. File a claim immediately with the carrier, stating the extent of the damage. Carefully check all envelopes, shipping labels, and tags before removing or destroying them. Ensure that the parts in the Kit Contents List are included in the package. If you are missing any parts, contact Customer Support at 1-800-264-3578, 7 a.m. to 5 p.m., Monday through Friday (CT).

**Table 1 Kit Contents** 

Description	Part No.	Qty.
BRKT,CNSM/LAT,REAR HEADLINER,19SILV 1500	865203181	2
SCREW, #10 TYPE B, 6-LOBE, BLACK	7011246-06	8
1/4-20 X 3/4 HEX CAP SCREW 18-8 SS	7000A311-12	2
1/4-20 NE NYLON INSERT L/N 18-8 SS	7058A010	2
1/4 X 1 1/2 FENDER WASHER STL ZC	7072274A	2
1/4 SAE F/W WASHER 1/16 THK 18-8 SS	7072A024	2

### Installing the Brackets

## **A** WARNING

AIRBAG DEPLOYMENT: Do not install equipment or route wiring in the deployment path of an airbag. Failure to observe this warning will reduce the effectiveness of the airbag or potentially dislodge the equipment, causing serious injury or death.

### **NOTICE**

DRILLING PRECAUTIONS: Before drilling holes, check the area you are drilling into to be sure you do not damage vehicle components while drilling. All drilled holes should be de-burred and all sharp edges should be smoothed. All wire routings going through drilled holes should be protected by a grommet or convolute/split loom tubing.


**IMPORTANT:** Plan all cable routing before the installation.

To install the brackets:

- 1. Remove the headliner according to the vehicle manufacturer's instructions.
- **2.** From the inside of the vehicle, install 1/4-inch bolts, flat washers, and brackets onto the locations shown in Figures 1 and 2.
- **3.** From the inside of the vehicle, install the fender washers and lock nuts to the bolts. This can be done by reaching into the oblong hole adjacent to the bracket mounting hole. Tighten the bolts.

Figure 1 Bottom View

Install brackets to these holes

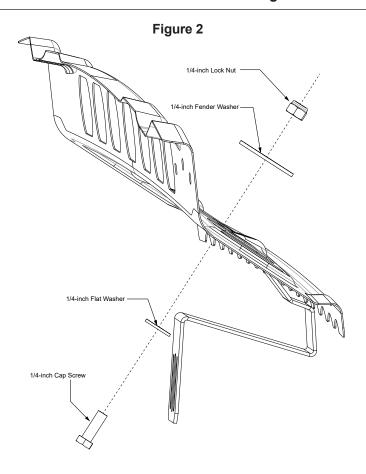

**4.** Reinstall the headliner according to the vehicle manufacturer's instructions. See Figure 3.



5. If installing a CN SignalMaster™, install the light head to the brackets using the 8 #10 screws supplied with this kid. If installing a Latitude, install the light head to the brackets using the carriage bolts, nuts, and washers supplied with the latitude. See Figure 4.



Figure 4 (Ford F150 shown)

**6.** Complete the wiring according to the instructions supplied with the light heads.

## **▲** WARNING

LIGHT HAZARD: To be an effective warning device, an emergency warning system produces bright light that can be hazardous to your eyesight when viewed at a close range. Do not stare directly into the lights at a close range, or permanent damage to your eyesight may occur.

**7.** Test the light head for proper operation.

### **Getting Technical Support and Service**

For technical support and service, please contact:

Service Department Federal Signal Corporation Phone: 1-800-433-9132 Fax: 1-800-343-9706

Email: empserviceinfo@fedsig.com

www.fedsig.com

### **Getting Repair Service**

The Federal Signal factory provides technical assistance with any problems that cannot be handled locally.

Any units returned to Federal Signal for service, inspection, or repair must be accompanied by a Return Material Authorization (RMA). Obtain a RMA from a local Distributor or Manufacturer's Representative.

Provide a brief explanation of the service requested, or the nature of the malfunction.

Address all communications and shipments to the following:

Federal Signal Corporation Service Department 2645 Federal Signal Drive University Park, IL 60484-3167

# **Ordering Replacement Parts**

To order replacement parts, call Customer Support at 1-800-264-3578, 7 a.m. to 5 p.m., Monday through Friday (CT) or contact your nearest distributor.

### **Limited Warranty**

This product is subject to and covered by a limited warranty, a copy of which can be found at www.fedsig.com/SSG-Warranty. A copy of this limited warranty can also be obtained by written request to Federal Signal Corporation, 2645 Federal Signal Drive, University Park, IL 60484, email to info@fedsig.com or call +1708-534-3400.

This limited warranty is in lieu of all other warranties, express or implied, contractual or statutory, including, but not limited to the warranty of merchantability, warranty of fitness for a particular purpose and any warranty against failure of its essential purpose.



2645 Federal Signal Drive University Park, Illinois 60484-3167

www.fedsig.com

Customer Support

Police/Fire-EMS: 800-264-3578 • +1 708 534-3400
Work Truck: 800-824-0254 • +1 708 534-3400
Technical Support: 800-433-9132 • +1 708 534-3400

© Copyright 2020 Federal Signal Corporation
All product names or trademarks are properties of their respective owners.