



► Model 371LEDX

# Commander® Hazardous Location LED Rotating Light



Model 371LEDX hazardous location warning lights have an array of 12 powerful LEDs arranged below a reflector. The reflector focuses the light from the LEDs into a high-intensity beam and rotates 360-degrees.

The LEDs, reflector, and motor module are sealed under a polycarbonate dome which completes a water-tight, dust-tight enclosure. The dome and ring assembly simply screw on, providing access to the interior of the light.

The 371LEDX base is hard coat anodized and features electrostatically applied black powder paint for greater corrosion resistance. Wiring can be routed through the pipe-mount opening in the bottom of the light or the two side knockouts can be used for side entry wiring. Installation can be surface or 1-inch NPT pipe mounted.

## FEATURES

- Available in 120VAC
- 50,000 hour LED light source
- Surface mount and integrated 1-inch NPT pipe mount
- Type 4X, IP66 enclosure
- IP69K compliant
- UL and cUL Listed for Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G; Class III

MODEL	VOLTAGE	OPERATING CURRENT	REVOLUTION/ MINUTE	LIGHT OUTPUT	MOUNT
<b>371LEDX-120 *</b>	120VAC 50/60Hz	0.32 amps	60	15,000 cd	1" NPT Pipe/Surface


\*Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green or (R) Red

### HAZARDOUS LOCATION RATING: 371LEDX

T-CODE AT MAXIMUM AMBIENT TEMPERATURE, °C

Hazardous Location	40°C
Class I, Division 2, Groups A, B, C, D	T5
Class II, Division 2, Groups F, G	T6
Class III	T6

# Commander® Hazardous Location LED Rotating Light (371LEDX)

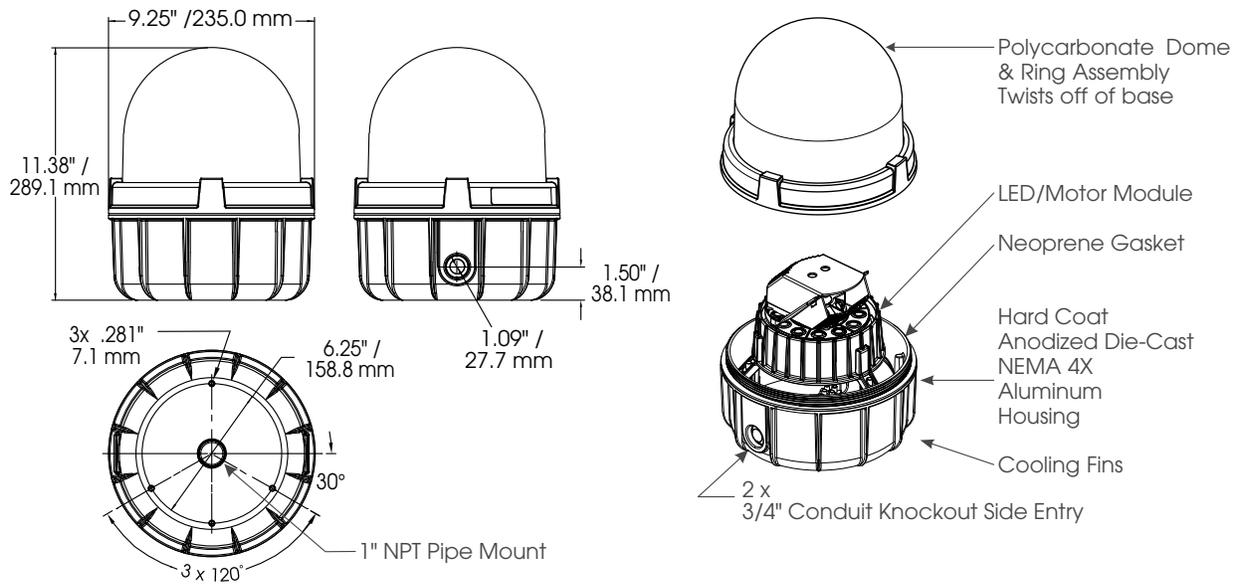

## SPECIFICATIONS

Lamp Life:	50,000 Hours	
Light Source:	LED	
Operating Temperature:	-31°F to 104°F	-35°C to 40°C
Net Weight:	7.1 lbs	3.2 kg
Shipping Weight:	8.1 lbs	3.7 kg
Height:	11.38"	289.1 mm
Diameter:	9.25"	235.0 mm

## HOW TO ORDER

<b>371LEDX</b>	-	<b>120</b>	<b>A</b>
<b>TYPE</b> 371LEDX		<b>VOLTAGE</b> 120VAC 50/60Hz	<b>COLOR</b> <b>A</b> Amber <b>B</b> Blue <b>C</b> Clear <b>G</b> Green <b>R</b> Red

## REPLACEMENT PARTS

Description	Part Number
Gasket, Surface Mount	K8459127A
LED/Motor Module, Amber	K8459159A-A
LED/Motor Module, Blue	K8459159A-B
LED/Motor Module, White	K8459159A-W
LED/Motor Module, Green	K8459159A-G
LED/Motor Module, Red	K8459159A-R

<sup>1</sup> Includes 1 dome gasket

## OPTIONAL ACCESSORIES

Description	Part Number
Crane reflector kit, 22.5-degrees	371LED-KIT-CR
Solid Surface Mounting Bracket	371BRCKT
Shock Mount Kit	K8459A076C
3/4" Hub Kit	K8459138A
1" Plug Kit	K8459130A



371LED/371LEDX is shipped from the factory with the standard reflector that creates a horizontal light beam that is 90 degrees from the vertical orientation resulting in a wide light output distribution.



371LEDX with the 371LED-KIT-CR reflector installed reflects the light beam at 22.5 degrees from the vertical orientation resulting in a focused light output.