


Latitude™

Perimeter Light

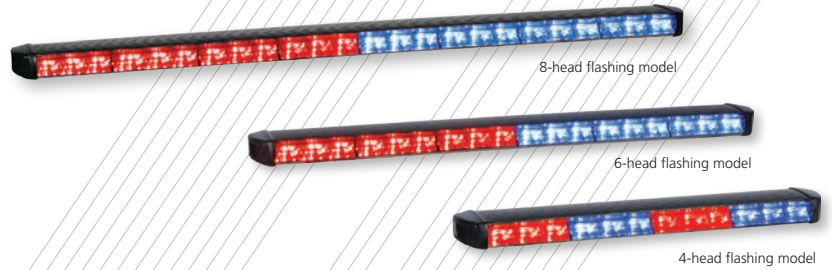

FEATURES

- Low-profile, interior or exterior mount stick light
- Single-color
- 4-, 6-, and 8-head models
- [10] flash patterns
- 12 Vdc
- Five-year warranty

APPROVALS

- SAE J595, Class 1
- SAE J845 Class 2 (Amber, Blue)
- SAE J845, Class 1 (Red)
- CCR Title 13

FS TECHNOLOGIES



Versatile, High-Performance Warning Light

Latitude™ offers the flexibility to enhance any vehicle warning solution. With (3) LEDs per position and Federal Signal's Solaris® LED reflectors, it provides impressive optical performance for police vehicles, command units, and work truck. Models are available in 4-, 6-, and 8-head configurations to match a wide range of applications. For models with directional capabilities, refer to the Latitude SignalMaster™ product data sheet.

Flashing Latitude models are programmed with (10) attention-getting flash patterns plus a test pattern, helping ensure your warning signals are seen in demanding environments.

Engineered for durability, Latitude incorporates exclusive ROC (Reliable On-Board Circuitry™) technology to help eliminate failure points found in traditional warning lights. Designed for both interior and exterior use, it features an innovative co-extrusion polycarbonate housing that enhances moisture resistance and supports dependable, long-lasting performance.



HOW TO ORDER

4-HEAD FLASHING MODEL, 16.9 INCH LENGTH

SL4F-2R2B	(2) Red LED reflectors, (2) Blue LED reflectors (alternating) R-B-R-B
SL4F-RB	(2) Red LED reflectors, (2) Blue LED reflectors, R-R-B-B
SL4F-R	(4) Red LED reflectors, R-R-R-R-R
SL4F-B	(4) Blue LED reflectors, B-B-B-B
SL4F-A	(4) Amber LED reflectors, A-A-A-A

6-HEAD FLASHING MODEL, 24.2 INCH LENGTH

SL6F-RB	(3) Red LED reflectors, (3) Blue LED reflectors, R-R-R-B-B-B
SL6F-R	(6) Red LED reflectors, R-R-R-R-R-R
SL6F-BR	(3) Blue LED reflectors, (3) Red LED reflectors, B-B-B-R-R-R
SL6F-B	(6) Blue LED reflectors, B-B-B-B-B-B
SL6F-AW	(3) Amber LED reflectors, (3) White LED reflectors, A-A-A-W-W-W
SL6FF-RW	(3) Red light heads, (3) White light heads, R-W-R-W-R-W (includes white light cut-off option)
SL6F-A	(6) Amber LED reflectors, A-A-A-A-A-A


8-HEAD FLASHING MODEL, 31.8 INCH LENGTH

SL8F-RB	(4) Red LED reflectors, (4) Blue LED reflectors, R-R-R-R-B-B-B-B
SL8F-R	(8) Red LED reflectors, R-R-R-R-R-R-R-R
SL8F-B	(8) Blue LED reflectors, B-B-B-B-B-B-B-B
SL8F-A	(8) Amber LED reflectors, A-A-A-A-A-A-A-A
SL8F-BR	(4) Blue LED reflectors, (4) Red LED reflectors, B-B-B-B-R-R-R-R
SL8F-4R4B	(4) Red LED reflectors, (4) Blue LED reflectors (alternating) R-B-R-B-R-B-R-B
SL8F-AW	(4) Amber LED reflectors, (4) White LED reflectors, A-A-A-A-W-W-W-W
SL8F-BA	(4) Blue LED reflectors, (4) Amber LED reflectors, B-B-B-B-A-A-A-A

MOUNTING BRACKETS



320310
Flush mount, vertical surface




320320
Lightbar or rear deck mount



320330
System mount



320340
Universal mount



320350
Foot adapter mount



SLB-001
Long L-bracket



SLB-002
Short L-bracket



SLB-FRD15ND
8-head rear headliner bracket, no drill, Ford F-150 2015-2024, Lightning 2022-2025, and Super Duty 2017-2025



SLB-SIL19ND
8-head bracket for CN SignalMaster or Latitude, no drill, Chevrolet Silverado 2019-2025

COMPLIANCE

	SAE J845		SAE J595	CCR TITLE 13
	CLASS	COVERAGE	CLASS	
AMBER	2	45°	1	Class B
BLUE	2	40°	1	Class B
RED	1	40°	1	Class B

SPECIFICATIONS

LED Color: A B R W Lens Color: C

	4-HEAD	6-HEAD	8-HEAD
VOLTAGE		12 Vdc	
AMP DRAW	2 A	3 A	4 A
OPERATING TEMP.	-22° to +149° F (-30° to +65° C)		
PHYSICAL SPECIFICATIONS LIGHT HEAD			
LENGTH	16.9 in (42.9 cm)	24.2 in (61.5 cm)	31.2 in (80.7 cm)
WIDTH	2.6 in (6.7 cm)	2.6 in (6.7 cm)	2.6 in (6.7 cm)
HEIGHT	1.1 in (2.9 cm)	1.1 in (2.9 cm)	1.3 in (2.9 cm)
SHIP WEIGHT			
	3.1 lb (1.4 kg)	3.8 lb (1.7 kg)	4.0 lb (1.8 kg)



Latitude, SignalMaster, Solaris, and ROC (Reliable Onboard Circuitry) are trademarks of Federal Signal Corporation.