



► Models LP22LED

StreamLine® Low Profile LED Lights

Model LP22LED is a multi-pattern LED light ideal for applications requiring low-profile signaling. The unit can be surface, panel, or 1/2-inch NPT pipe mounted through the integrated pipe mount. The enclosure offers a self-extinguishing polycarbonate housing that protects against vibrations, dust, and atmospheric elements, and is rated Type 4X.

The LP22LED has four flash patterns (steady light, single flash, double flash, and triple flash) selectable via DIP switch.



FEATURES


- Available in 12-24 Vac/dc and 90-240 Vac
- 1/2-inch NPT pipe, surface or panel mount
- Four flash patterns
- Five lamp/lens colors: Amber, Blue, Clear, Green, and Red
- Self-extinguishing polycarbonate housing
- Type 4X, IP66 enclosure
- CE and UKCA compliant
- UL and cUL Listed

MODEL	VOLTAGE	STEADY	FLASH RATE/MINUTE		
			SINGLE FLASH	DOUBLE FLASH	TRIPLE FLASH
LP22LED-012-024*	12-24 Vac/dc	N/A	120 (+/-10)	90 (+/-10)	140 (+/-10)
LP22LED-090-240*	90-240 Vac	N/A	120 (+/-10)	90 (+/-10)	140 (+/-10)

* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, or (R) Red

MODEL	MAXIMUM OPERATING CURRENT (mA)			
	12 Vac/dc	24 Vac/dc	90 Vac	240 Vac
LP22LED-012-024*	180	180	N/A	N/A
LP22LED-090-240*	N/A	N/A	40	40

StreamLine® Low Profile LED Lights (LP22LED)

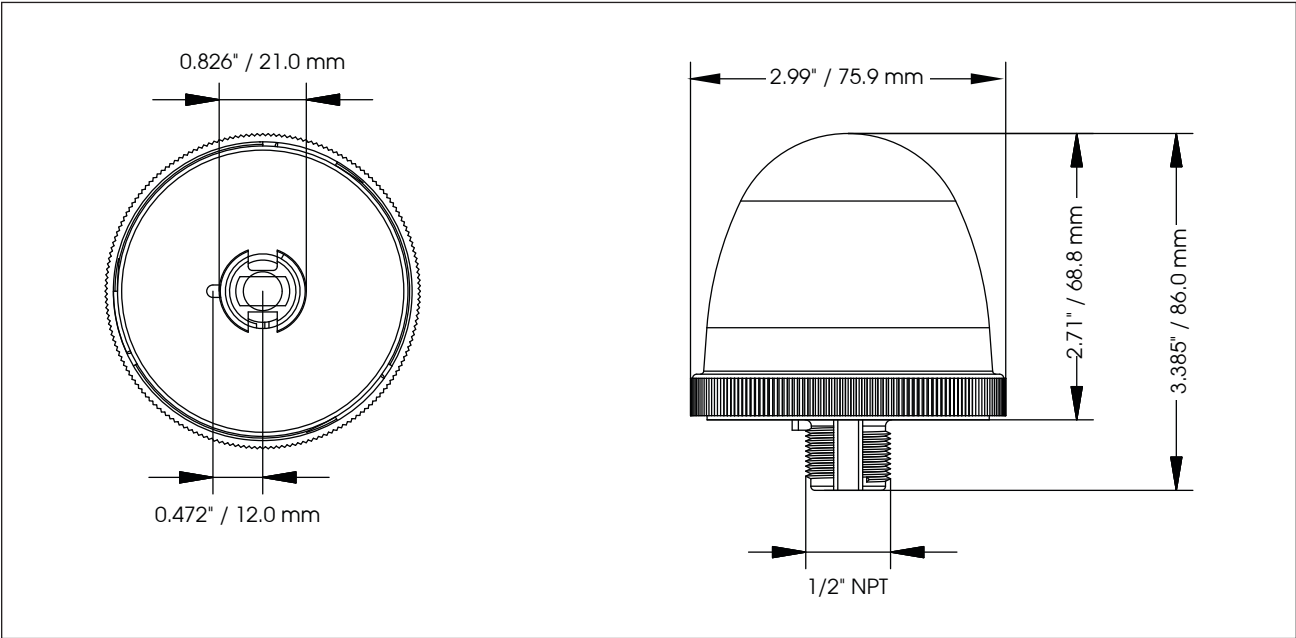

SPECIFICATIONS

Lamp Life:	50,000 Hour
Light Source:	LED
Operating Temperature:	-22° to 122°F (-30° to 50°C)
Net Weight:	5.29 lb (0.15 kg)
Shipping Weight:	1.13 lb (0.51 kg)
Height:	3.39 in (86.0 mm)
Height - above surface:	2.71 in (68.8 mm)
Diameter:	2.99 in (75.9 mm)

HOW TO ORDER

LP22LED	- 012-024	A
TYPE LP22LED	VOLTAGE 012-024 (12-24 Vac/dc) 090-240 (90-240 Vac)	COLOR A Amber B Blue C Clear G Green R Red