



Ex d Surface Mount

Ex d Trunnion Mount

Ex de Surface Mount

Model G-SND

Global Series® Hazardous Location Sounder

Federal Signal Global Series® Sounders are available in explosion-proof Ex versions, increased safety Ex de wiring box versions and are certified for gas Group IIC environments.

The Global Series Sounder can be wired to perform two separate functions. A single tone can be selected via a rotary switch; once power is supplied, it will sound the selected tone. Alternatively, multiple tones can be selected remotely by choosing the appropriate combination of inputs.¹ This allows a unique sound to match a specific alarm condition or to be used to escalate an alarm condition.

The Global Series sounder can be combined with all other Global Series audible and visual products in several custom configurations. Custom configurations can be ordered directly from the factory. Optional coupling kits, which allow limited field fixturing, are available.

FEATURES

- Supports 3 operational voltages: 24VDC, 120VAC 50/60Hz, and 230VAC 50/60Hz
- Optional 316 stainless steel ratchet adjustable mounting U-bracket (field installation required)
- Gain control
- 15 Selectable Tones
- Non-metallic corrosion resistant design
- 15 watt design
- Field customizable legend plates available²
- Optional indicator rings are available in six colors: Black, Blue, Green, Magenta, Red and Yellow
- Two M20 entries standard on Ex d models, three M20 entries standard on Ex de models
- Type 4X, IP66 enclosure
- Zone 1, 21 Rated, IECEx, ATEX, Ex d IIC, Ex de IIC and Ex tb IIIC
- UL and cUL Listed for Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G; Class III
- UL and cUL Listed for Class I, Zone 1 AEx db IIC T4: Zone 21, AEx tb IIIC T4/135°C)
- UL Fire Listed (24VDC operating voltage ONLY)
- UKEX certified

MODEL	OPERATING VOLTAGE	NOMINAL OPERATING CURRENT ³	DECIBELS ⁴	
			10'	1 M
G-SND	24VDC	0.460 amps	100	110
	120/230VAC 50/60Hz	0.140/0.080 amps	100	110

¹ Refer to application guide for specific wiring details

² Recommended labels: BRADY #B-855 Toughwash labels or ULINE #S-16643 weather resistant

³ Operating current varies with frequency content and input power

⁴ Measured using on-board tone 9 at nominal input voltage

UL/cUL HAZARDOUS LOCATION RATING

TEMPERATURE CODE AT 70°C

Class I, Division 2, Groups A, B, C, D	T4
Class II, Division 2, Groups F, G	T6
Class III	T6

UL/cUL HAZARDOUS LOCATION CLASS/ZONE

TEMPERATURE CODE AT 70°C


T4

ATEX/IECEx HAZARDOUS LOCATION RATING

TEMPERATURE CODE AT 49°C	TEMPERATURE CODE AT 70°C
T5 (in IIB)	T4 (in IIB)
T4 (in IIC)	T4 (in IIC)



Global Series® Hazardous Location Sounder (G-SND)

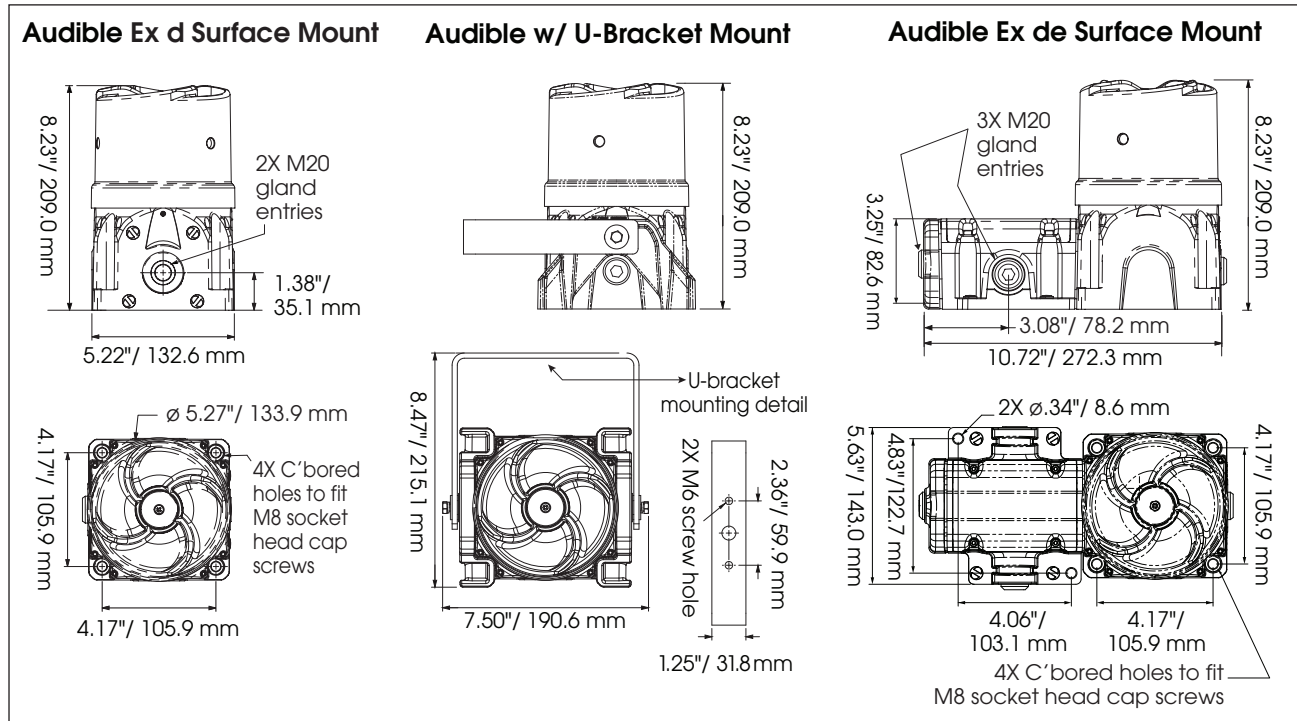

SPECIFICATIONS

Operating Temperature: -67°F to 158°F -55°C to 70°C

ATEX/IECEx Certification Marking:

Ex db IIB T5 Gb or Ex db e IIB T5 Gb

Ex tb IIIC T100°C Db IP66

Ex db IIC T4 Gb or Ex db e IIC T4 Gb

Ex tb IIIC T135°C Db IP66

ATEX: Baseefa15ATEX0155X

IECEx: IECEx BAS 15.0104X

External Fasteners: 316 stainless steel

Terminals: Ex d: 11 way block (3 in, 3 out with 4-tone selection terminals & select line)

Ex de: 3-pole, 4 position quad pole terminal blocks

Cable Entries: Ex d: 2 entries - M20 x 1.5
Ex de: 3 entries - M20 x 1.5

UL and cUL Certification Marking:

Class I, Division 2, Groups A,B,C,D

T4 @ 70°C

Class II, Division 2, Groups F,G

T6 @ 70°C

Class III

T6 @ 70°C

UL and cUL E12629

Net Product Weight:

Ex d Surface Mount 9.61 lbs 4.36 kg

Ex d U-Bracket Mount 11.59 lbs 5.26 kg

Ex de Surface Mount 12.43 lbs 5.64 kg

REPLACEMENT PARTS

Description

Part Number

Multi-voltage G-SND Sounder Kit (Includes PCBAs, Bracket, Driver, & Mounting Screws) K859501404

Accessories

E-Box Endcap with M20 Opening K859500805-02

E-Box Endcap with M25 Opening K859500805-01

E-Box Cover Assembly (Includes two terminal blocks, mounting plate, retention hardware) K859501414

Adapter, M20 Male to 1/2" Female NPT K231246A

Adapter, M20 Male to 3/4" Female NPT K231247

Wall Mount Bracket G-KIT-WBKT

* Field Installation Required

HOW TO ORDER

