



Models AD-SF-25, AD-SS-25 and AD-SO-25

Atkinson Dynamics® Non-Amplified Speakers

Available for both indoor and outdoor applications, these 25-watt speakers feature a heavy duty cast aluminum housing with powder coat finish, talk-back capability, and optional integrated volume control. Speakers are available for flush, wall, and swivel mounting.


FEATURES

- 25-watt speakers
- Heavy-duty cast aluminum housing
- Powder coat paint finish
- Flush, wall, and swivel mount options
- Indoor/outdoor use
- Type 4X, IP66 enclosure

Non-Amplified Speakers Requires option (-8), Pre-Amp Equipped

MODEL	FREQUENCY RESPONSE	INPUT IMPEDANCE	MOUNTING
AD-SF-25	800-5000 Hz	8 Ω	Flush
AD-SS-25	800-5000 Hz	8 Ω	Swivel
AD-SO-25	800-5000 Hz	8 Ω	Wall

Atkinson Dynamics Non-Amplified Speakers (AD-SF-25, AD-SS-25 and AD-SO-25)

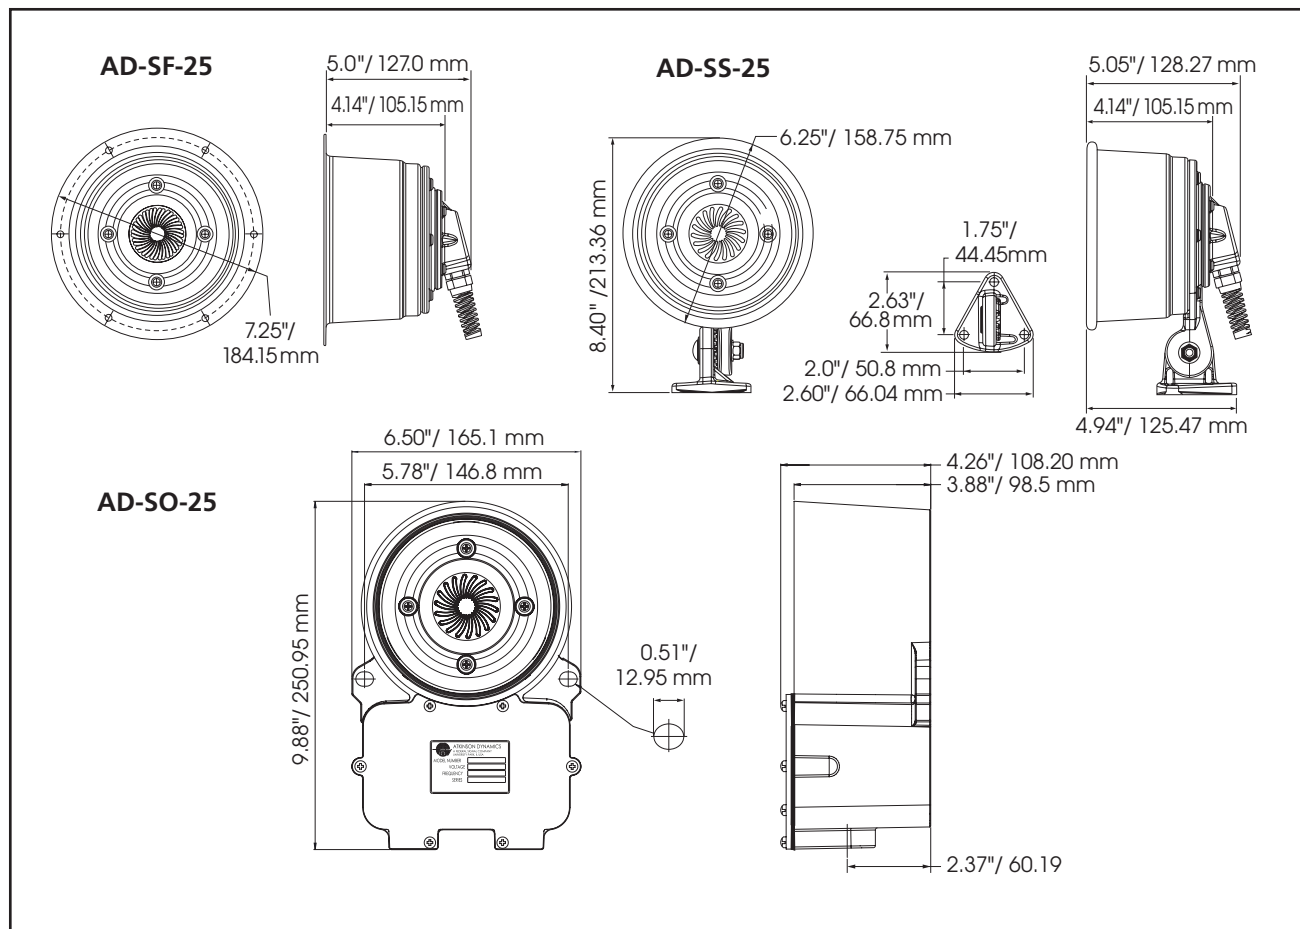

SPECIFICATIONS

Speaker Rating:	25 watt	
Operating Temperature:	-50° to 150°F 46° to 66°C	
Net Weight:		
AD-SF-25	5.0 lb	2.27 kg
AD-SS-25	6.0 lb	2.72 kg
AD-SO-25	8.0 lb	3.63 kg
Shipping Weight:		
AD-SF-25	5.5 lb	2.49 kg
AD-SS-25	6.0 lb	2.72 kg
AD-SO-25	10.0 lb	4.53 kg
Dimensions:		
AD-SF-25		
Diameter	7.25"	184.2 mm
Depth	5.00"	127.0 mm
AD-SS-25		
Height	8.40"	213.4 mm
Width	6.25"	158.8 mm
Depth	5.05"	128.3 mm
AD-SO-25		
Height	9.88"	251.0 mm
Width	6.50"	165.1 mm
Depth	4.26"	108.2 mm

HOW TO ORDER

Specify Model:

Non-Amplified Speakers:

AD-SF-25 (flush mount)

AD-SS-25 (swivel mount)

AD-SO-25 (wall mount)