

► Models LP22LED RGB

StreamLine® Low Profile Multicolor LED Lights



Model LP22LED RGB is a steady, multicolor LED light with an opaque lens ideal for applications requiring low profile, proximity signaling. This model is equipped with RGB LEDs that allow users to select one of seven color options (Amber, Blue, Green, Magenta, Red, White, Yellow) under one unit.

LP22LED RGB offers a self-extinguishing polycarbonate housing that protects against vibrations, dust, and atmospheric elements. It can be surface, panel, or 1/2-inch NPT pipe mounted through the integrated pipe mount.



LENS COLOR OPTIONS




FEATURES

- Available in 12-24 Vac/dc and 90-240 Vac
- Surface, panel, or 1/2-inch NPT pipe mount
- Steady light effect
- Seven color options in one unit: Amber, Blue, Green, Magenta, Red, White, and Yellow
- Self-extinguishing polycarbonate housing
- Type 4X, IP65 enclosure
- CE Certified
- UL and cUL Listed

MODEL	MAXIMUM OPERATING CURRENT (mA)			
	12 Vac/dc	24 Vac/dc	90 Vac	240 Vac
LP22LED-012-024RGB	220	220	N/A	N/A
LP22LED-090-240RGB	N/A	N/A	40	40

StreamLine® Low Profile Multicolor LED Lights (LP22LED RGB)

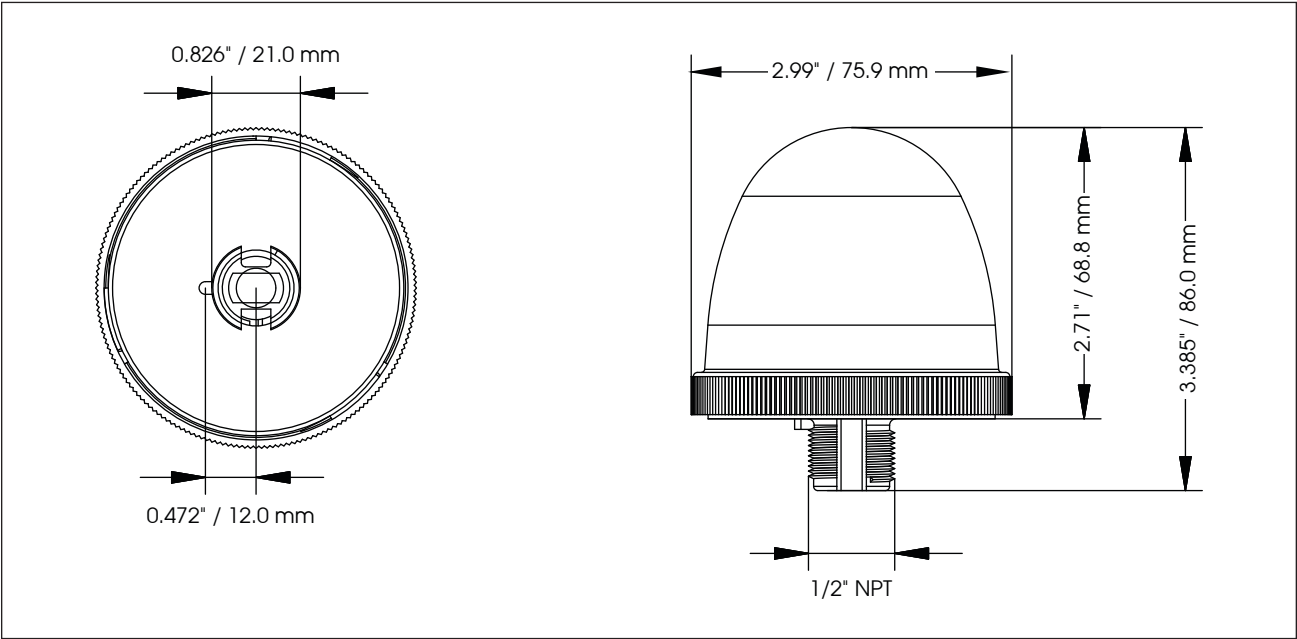

SPECIFICATIONS

Lamp Life:	50,000 Hours
Light Source:	LED
Operating Temperature:	-22° to 122°F (-30° to 50°C)
Net Weight:	3.53 oz (0.1 kg)
Shipping Weight:	1.02 lb (0.46 kg)
Height:	3.39 in (86.0 mm)
Height - above surface:	2.71 in (68.8 mm)
Diameter:	2.99 in (75.9 mm)

HOW TO ORDER

LP22LED - **012-024** **RGB**

TYPE
LP22LED

VOLTAGE
012-024
(12-24 Vac/dc)
090-240
(90-240 Vac)