

Replacement Break Glass Hammer Bar with Chain Installation Kit Instructions for Call Point Model CP-BF

Safety Messages to Installers

It is important to follow all instructions shipped with this product. This Call Point station and its options are to be installed by a trained electrician who is thoroughly familiar with and will follow all applicable national and local codes in the country of use. This Call Point station should be considered a part of the warning system and not the entire warning system. The selection of the mounting location for the Call Point station, its controls and the routing of the wiring are to be accomplished under the direction of the facilities engineer and the safety engineer. In addition, listed below are some other important safety instructions and precautions you should follow:



- Read and understand all instructions before installing and operating this equipment.
- To avoid electrical shock hazards, do not connect wires when power is applied. Failure to observe this warning may lead to serious injury or death.
- Never alter the unit in any manner. Safety in hazardous locations may be endangered if additional openings or other alterations are made in units specifically designed for use in these locations.
- Do not connect this station to the system or modify it when power is on.
- After installation, ensure that all threaded joints are properly tightened.
- Keep the unit tightly closed when in operation.
- After installation, test the station and the system to ensure that it is operating properly with the option installed.
- After testing is complete, provide a copy of this instruction sheet to all personnel.
- Establish a procedure to routinely check the station and system for proper activation and operation.

Failure to follow all safety precautions and instructions may result in property damage, serious injury, or death.

Installing or Replacing the Break Glass Hammer Bar

The break glass hammer bar with chain assembly is supplied with two mounting screws to attach to Federal Signal CP-BG (Break Glass) stations which do not have a stainless steel duty label already attached to its rear housing side exterior wall. To replace a hammer bar assembly that was attached to the side of the station, or to add this option to a break glass station, the steps to be followed are:

1. If replacing an existing hammer bar assembly: remove the previous hammer bar from the side bracket clip, to access and remove the two #4 screws. Remove the complete assembly from the station's side.
2. Open the kit and remove the hammer bar from the bracket clip; attach the assembly to the rear side wall of the station with the two supplied #4 screws.
3. Insure the bracketed assembly is securely attached to the station and that the hammer bar is adequately linked to the assembly.
4. If the desire is to have the hammer bar assembly on the right side of the station, the rear housing may be rotated 180° to do so, but note the new location of the three entry ports will change also.

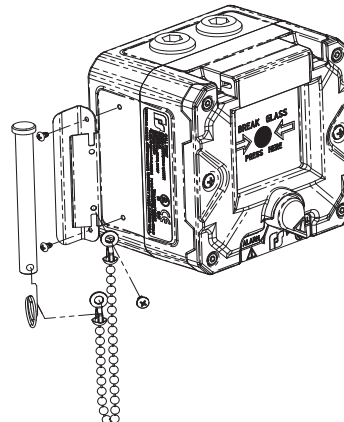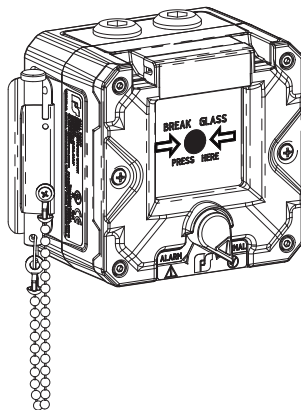

Technical Support and Service

For additional information regarding the Federal Signal line of Manual Call Points Stations, refer to the station's Installation & Maintenance Instructions manual #25500424A.

The Federal Signal factory provides technical assistance with any problems that cannot be handled locally. Any units returned to Federal Signal for service, inspection, or repair must be accompanied by a Return Material Authorization (RMA). Obtain a RMA from a local Distributor or Manufacturer's Representative. Please provide a brief explanation of the service requested, or the nature of the malfunction.

Technical Support Tel: 1-800-755-7621 | +1 708-587-3587

To order additional parts, contact Customer Support: +1 708-534-4756

Email: signalsupport@fedsig.com

Limited Warranty

This product is subject to and covered by a limited warranty, a copy of which can be found at www.fedsig.com/SSG-Warranty. A copy of this limited warranty can also be obtained by written request to Federal Signal Corporation, 2645 Federal Signal Drive, University Park, IL 60484, email to signalsupport@fedsig.com or call +1 708-534-4756.

This limited warranty is in lieu of all other warranties, express or implied, contractual or statutory, including, but not limited to the warranty of merchantability, warranty of fitness for a particular purpose and any warranty against failure of its essential purpose.



Signaling Devices

2645 Federal Signal Drive

University Park, IL 60484-3167

Tel: 708-534-4756

Tech Support Tel: 708-587-3587

Email: signalsupport@fedsig.com

www.fedsig.com