



- Models LP3E, LP3M, LP3P, LP3S, and LP3T

StreamLine® Low Profile Strobe Lights

Model LP3 is offered in five mounting configurations. The LP3S features a three-hole surface mount — ideal for control panels and other flat or flush surfaces. The LP3E features a standard A-19 medium Edison screw-in base. The LP3M features a 1/2-inch NPT male pipe mount and 18-inch wire leads. LP3P features an integrated 1/2-inch NPT pipe mount. The “T-mount” LP3T has a popular two-hole design for wall or flush mounting.

Models LP3M, LP3S, and LP3T include a surface gasket to complete the Type 4X installation. An optional dome guard is available for use with the LP3M, LP3S, and LP3T when installed flush with a panel. All LP3 units feature a threaded screw-on lens to allow for tool-free wiring and strobe tube replacement.

Like all StreamLine® products, the LP3 is designed with OEM applications in mind.



FEATURES

- Available in 12-48 Vdc, 120 Vac and 240 Vac; LP3E only available in 120 Vac
- Five mounting options: Edison (E), 1/2-inch NPT male pipe (M), Surface (S), T-Mount (T), integrated 1/2-inch NPT pipe (P)
- Five lens colors: Amber, Blue, Clear, Green, and Red
- Screw-on lens provides easy access
- Conformal coated PCBA
- Type 4X, IP66 enclosure
- Models LP3M, LP3P and LP3S, are IP69K compliant (excludes LP3E and LP3T)
- PLC and triac compatible
- CSA Certified
- UL and cUL Listed
- CE and UKCA certified

MODEL	VOLTAGE	OPERATING CURRENT	FLASH RATE / MINUTE	LIGHT OUTPUT PEAK ¹	ECP ²
LP3*-012-048**	12-48 Vdc	0.44-0.10 A	80 (+/-15)	175,000 cd	51.5 cd
LP3*-120**	120 Vac	0.10 A	80 (+/-15)	175,000 cd	51.5 cd
LP3*-240**	240 Vac	0.07 A	80 (+/-15)	175,000 cd	51.5 cd


* Indicates Mounting Style: (E) Edison A-19 Screw-in Base, (M) Male Pipe Mount, (P) Pipe Mount, (S) Surface Mount, (T) T-Mount

** Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, or (R) Red

¹ Peak candela is the maximum light intensity generated by a flashing light during its light pulse

² ECP (Effective Candela) is the intensity that would appear to an observer if the light were burning steadily

StreamLine® Low Profile Strobe Lights (LP3E, LP3M, LP3P, LP3S, and LP3T)

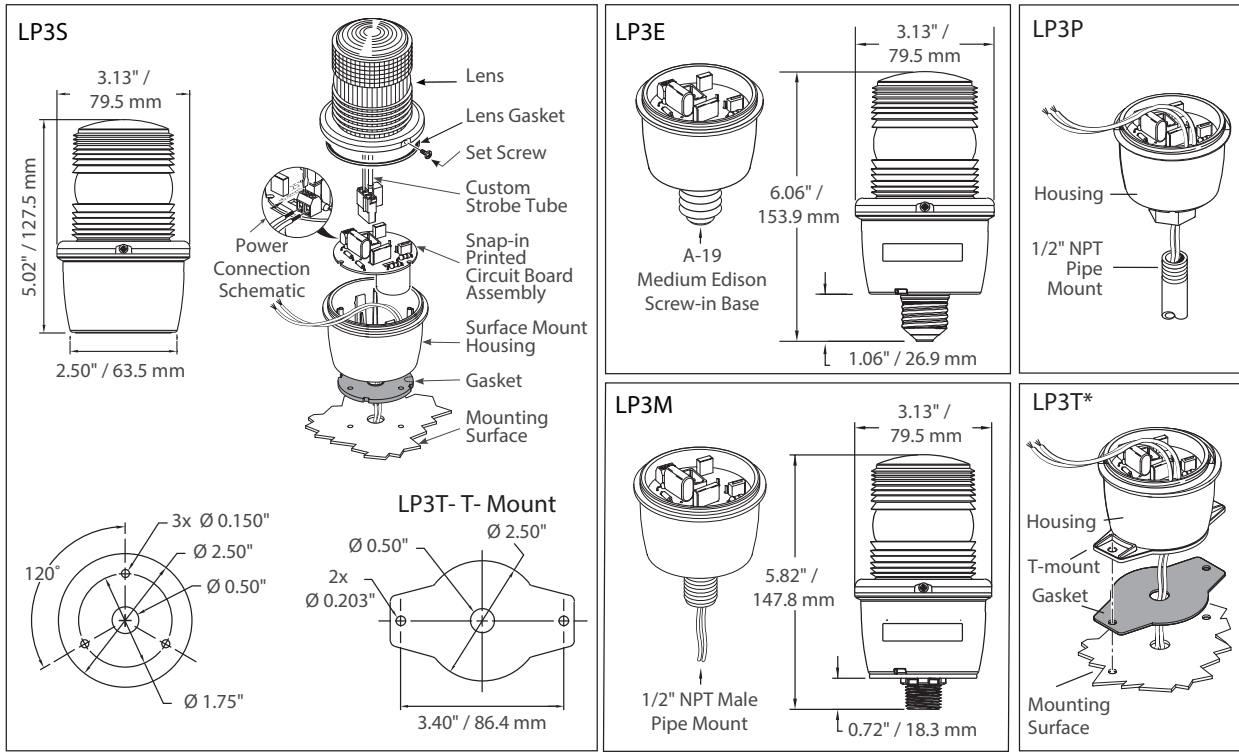


* LP3T-120 & 240 Vac shown, 24 Vdc wires protrude from side of base.

SPECIFICATIONS

Lamp Life:	4,000 Hours
Light Source:	Strobe tube
Operating Temperature:	-31° to 150°F (-35° to 66°C)
Net Weight:	7.3 oz (0.21 kg)
Shipping Weight:	8.5 oz (0.24 kg)
Height:	
LP3E	6.06 in (153.9 mm)
LP3M	5.82 in (147.8 mm)
LP3P	5.82 in (147.8 mm)
LP3S	5.02 in (127.5 mm)
LP3T	5.02 in (127.5 mm)
Diameter:	3.13 in (79.5 mm)

HOW TO ORDER

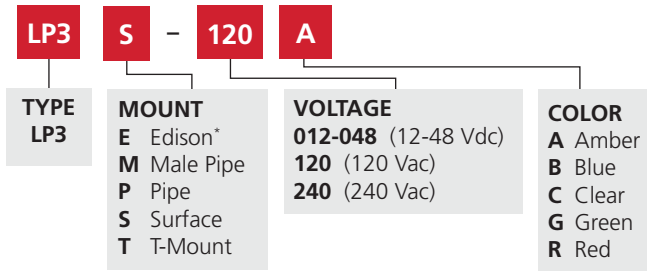

* LP3E only available in 120 Vac

ACCESSORIES

Description	Part Number
Wire Dome Guard for LP3M, LP3S, and LP3T	LP3G



LP3G

REPLACEMENT PARTS

Description	Part Number
Lens, Amber	K8589063A
Lens, Blue	K8589063A-01
Lens, Clear	K8589063A-02
Lens, Green	K8589063A-03
Lens, Red	K8589063A-04
Flash Tube Assembly	K149130A