

INSTRUCTION SHEET FOR MODEL 210296 110VAC ADAPTER FOR EVACUATOR ALARMS

SAFETY MESSAGE TO INSTALLERS



People's lives depend on your safe installation of our products. It is important to read, understand and follow all instructions shipped with this product.

Selection of mounting location for this device, its controls and routing of wiring should be made by the Facilities Engineer and the Safety Engineer.

Listed below are other important safety instructions and precautions you should follow.

- **Locate Backup Alarm** so it will operate safely under all conditions. The location must provide protection from impact and adverse weather conditions while allowing unobstructed sound projection to the target hazard area.
- All effective back up alarms produce loud sounds which, in certain circumstances, may cause permanent hearing loss. Take appropriate precautions such as wearing hearing protection. Recommendations in OSHA Sound Level Standard (29 CFR 1910) should not be exceeded.
- After installation, be sure that all fasteners are securely tightened.
- After installation and completion of initial systems test, establish a procedure to routinely check the back up alarm system for proper activation and operation.
- After installation and completion of initial system test, provide a copy of this instruction sheet to all personnel responsible for operation, periodic testing and maintenance of this equipment.
- To properly install a backup alarm: you must have a good understanding of truck and heavy equipment electrical procedures and systems, along with proficiency in the installation and use of safety warning equipment.
- When drilling into a structure, be sure that both sides of the surface are clear of anything that could be damaged.
- Ensure that the power supply voltage is within the voltage rating specified on the Backup Alarm.
- File these instructions in a safe place and refer to them when maintaining and/or reinstalling the product.

A. GENERAL.

The Model 210296 adapter allows a 12V rated Evacuator back up alarm to be operated from a standard 110Vac power outlet. For switched operation, a switched outlet is recommended.

B. INSTALLATION.

Select an installation location close to an outlet.

See figure 1. Cut the plug off of the 12V cable and separate the conductors. Terminate the ends with the ring terminals provided in the Evacuator installation kit.

NOTE

The negative wire is marked with minus “-” signs over its entire length.

Continue to install the alarm using the procedure specified in its installation instructions.

Ensure that the power cord is not allowed to hang where it may become snagged. Use cable ties (installer provided) if needed.

Copyright 2005 Federal Signal Corporation

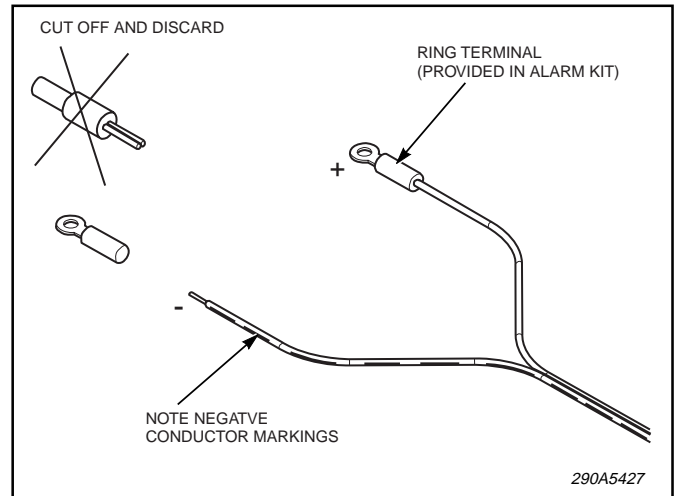


Figure 1.