

MPS SERIES RUBBER BOOT

IMPORTANT: Plan all cable routing before the installation.


▲ WARNING

AIRBAG DEPLOYMENT—Do not install equipment or route wiring in the deployment path of an airbag. Failure to observe this warning will reduce the effectiveness of the airbag or potentially dislodge the equipment, causing serious injury or death.

To mount the lights:

1. See Figure 1. Mark and cut out the recommended mounting hole.


Figure 1 Mounting holes for MPS300 and MPS600 with boot

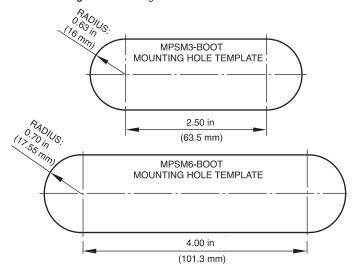

www.fedsig.com


- 2. See Figure 2. Insert the lighthead into the rubber boot.
- 3. Secure the lighthead to the boot with the provided Phillips-head screws.

Figure 2 Lighthead secured in boot with hardware



4. See Figure 3. Insert the assembly into the mounting hole. Ensure the boot is flush with the mounting surface.

Figure 3 Lighthead with boot inserted in mounting hole



25500016A 412