



LIGHTING PRODUCTS

FEDERAL SIGNAL CORPORATION
2645 Federal Signal Dr., University Park, IL 60484-3167
TEL 800.433.9132 FAX 800.343.9706
www.fedsig.com

SURFACE MOUNT

INSTALLATION INSTRUCTIONS

Before mounting check the identification label on the light for specific voltage and current requirements. Check that the length of the wiring is correct.

The DC fixture has a vehicle panel seal is designed to make a weather tight seal at the fixture and the mounting panel. This requires a hole to be drilled for the wires. The AC fixture has a rubber gasket that is installed between the fixture and the mounting panel. A cutout is required for the electronics box at the rear of the fixture. This needs approximately 1 7/8 inches behind the mounting panel. Refer to drawings on page 2.

Note: Before drilling holes place the light in position to check for fit. Ensure that the light is clear from all obstructions.

Install DC Surface Mount

Note: Do not use Loctite on any screws near the lamphead lens. The LED lampheads use Lexan lenses that can become brittle and prone to cracking when exposed to Loctite compounds.

1. Measure and mark the screw hole locations and through hole for the wiring. The mounting holes through the light bezel are clearance for #10 screws. Refer to drawings on page 2.
2. Drill the four (4) mounting holes and the wire feed thru hole.

Note: Ensure that the light is mounted with the word TOP on the lens up.

3. Connect the wiring, place the two (2) mounting gaskets in position on each side of the light. Ensure that the vehicle panel seal is aligned over the wire feed thru and seated correctly against the mounting surface.
4. Secure the fixture with four (4) screws.

Install AC Surface Mount

1. Measure and mark mounting location for cutout.
2. Cut out mounting hole.
3. Place the light in position to check for fit and mark mounting screw locations.
4. Double check the clearance around and behind the fixture. There should be a minimum of 3 inch clearance between wall insulation and the electronics box.
5. Drill mounting screw holes.

Note: Ensure that the light is mounted with the word TOP on the lens up.

6. Connect the wiring and ensure that the gasket is aligned.
7. Secure the fixture with four (4) screws.

Wiring

12/24 VDC

Connect the BLACK wire to GROUND.
Connect the RED (or WHITE) wire to POWER.

120/240 VAC

Connect the GREEN wire to chassis GROUND.
Connect the WHITE wire to RETURN.
Connect the BLACK wire to POWER.




**Surface Mount
Light**

Note: Do not use Loctite on any screws near the lamphead lens. The LED lampheads use Lexan lenses that can become brittle and prone to cracking when exposed to Loctite compounds.

The screw hole pattern and outside dimensions are the same for DC and AC fixtures.


Mounting holes are clearance or tapped for #10 screws.

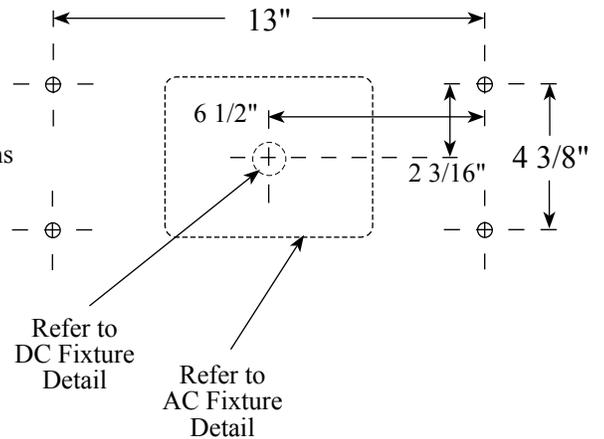


DC Fixture

NO CUTOUT REQUIRED

Drill four (4) holes for screws and one (1) centered hole for the wires. Drill wire hole from 3/8" to a maximum of 7/8" diameter.

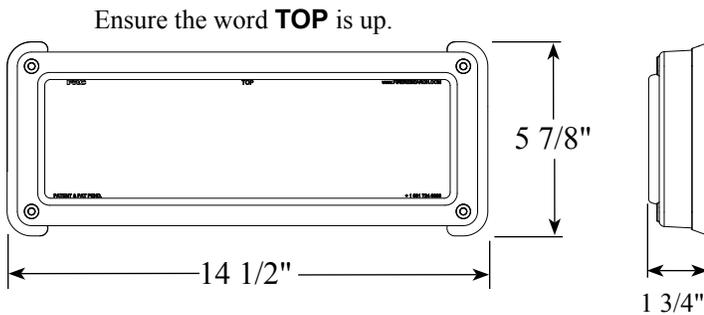


The vehicle panel seal is designed to make a weather tight seal at the fixture and the mounting panel.

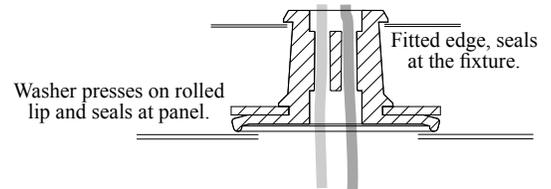

AC Fixture

PANEL CUTOUT REQUIRED

A cutout in the mounting panel for the electronics box is required.

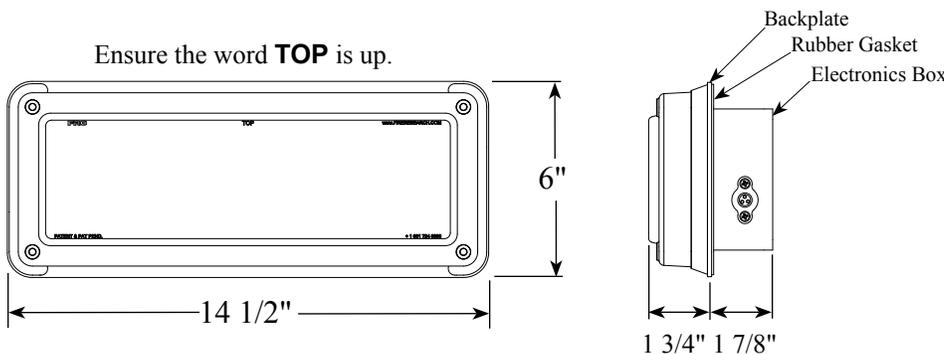

The rubber gasket is designed to make a weather tight seal at the fixture and the mounting panel.

