


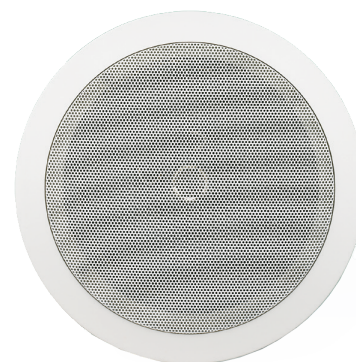

► Model AMR6

AudioMaster® 8 Watt Ceiling Speakers

Model AMR6 is a high-quality ceiling speaker for public address and music in industrial, municipal, and commercial office environments.

Power handling for the AMR6 is eight watt with transformer taps at 8, 4, 2, 1 and 0.5 watts. The AMR6-2570K operates in 25 or 70 V_{rms} systems and the AMR6-100K operates in 100 V_{rms} systems.

The speaker is designed to mount flush in a ceiling or wall cavity.

Construction materials were selected to provide years of service in demanding conditions. The steel speaker frame and grille are finished with white, staked epoxy for superior durability. Quick-release torsion spring mounting is provided for easy installation.


The AMR6 offers a wide frequency response of 110Hz to 20,000Hz that reproduces a full range of voice, music, and electronically-generated tones. To achieve these impressive results, both a woofer and a neodymium tweeter are utilized.

FEATURES

- Transformer coupled for 25, 70 or 100 V_{rms} systems
- 8 watt
- Flexible mounting
- Back box and tile bridge included

MODEL	POWER HANDLING	FREQUENCY RESPONSE	TRANSFORMER	POWER TAPS	SPL at 8W	
					10'	1 m
AMR6-2570K	8 watt	110-20,000 Hz	25 V_{rms}	8, 4, 2, 1, 0.5	92 dBa	102 dBa
	8 watt	110-20,000 Hz	70 V_{rms}	8, 4, 2, 1, 0.5	92 dBa	102 dBa
AMR6-100K	8 watt	110-20,000 Hz	100 V_{rms}	8, 4, 2, 1, 0.5	92 dBa	102 dBa

AudioMaster® 8 Watt Ceiling Speaker (AMR6)

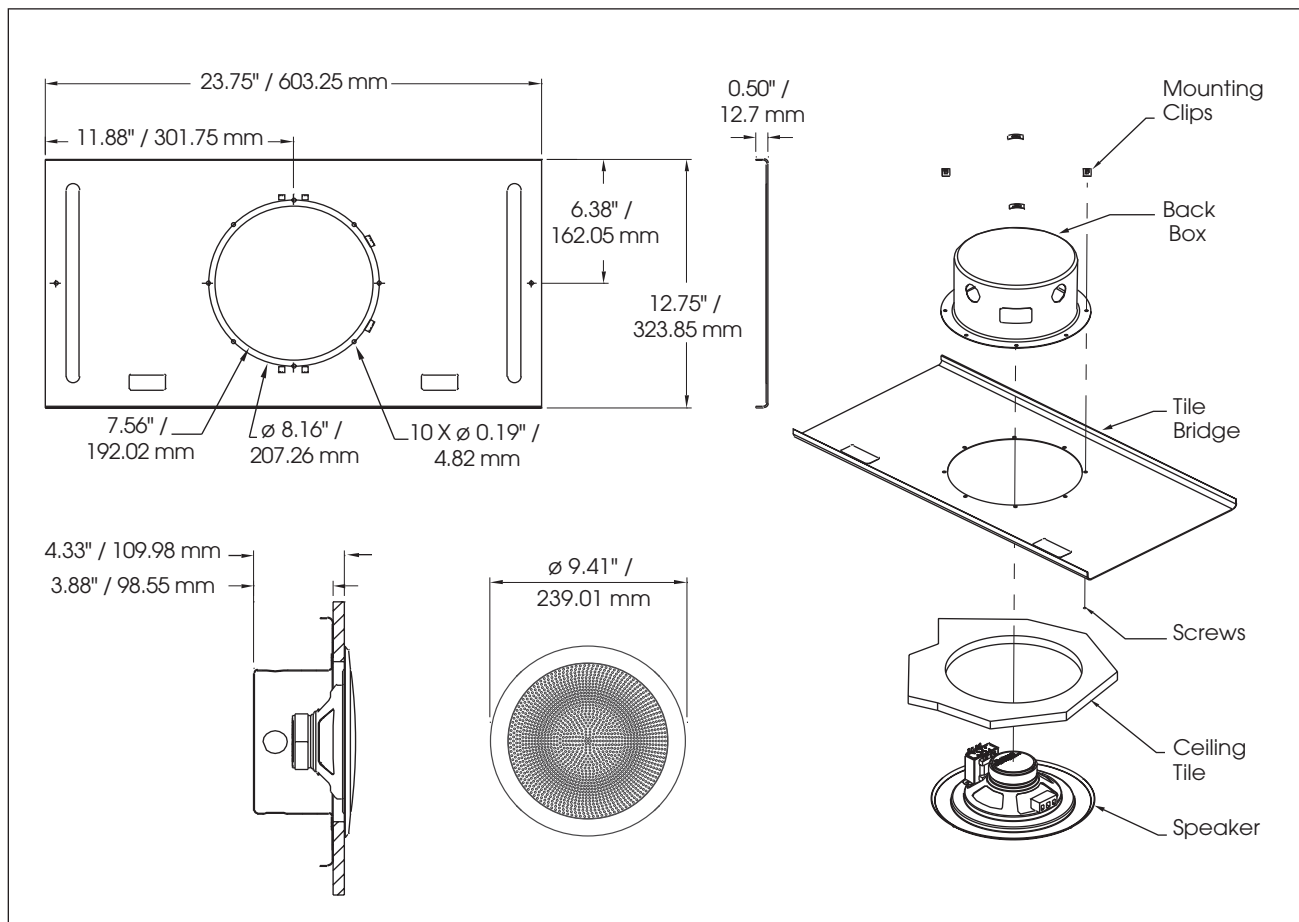

SPECIFICATIONS

Operating Temperature:	32° to 120°F	0° to 49°C	Weight:
	3.06 lbs.		1.39 kg
Shipping Weight:	4.75 lb		2.15 kg
Diameter:	9.41 "		239.0 mm
Depth:	4.33 "		110.0 mm

HOW TO ORDER

Specify Model:

AMR6-2570K – Speaker, round, ceiling, 6", transformer coupled, 25/70 V_{rms}

AMR6-100K – Speaker, round, ceiling, 6", transformer coupled, 100 V_{rms}