FEDERAL SIGNAL

Model 300

SelecTone® 15 W Amplified Speakers

SelecTone® Model 300 is a lightweight and compact, solid-state amplified speaker designed to amplify a pre-selected tone over existing ambient noises. The speaker cone and projector are made of spun aluminum. The internal amplifier circuitry and tone module are contained in a housing of diecast aluminum. Dust- and moisture-proof gasketing provides protection from the elements. All external components are sealed with powder-coat paint.

Model UTM (Universal Tone Module) is used with this device to generate one of (32) tones. Model 300 is designed to be used as a stand-alone, full output unit and cannot be used with a SelecTone Command Unit (public address is not possible).

Model 300 speaker/amplifiers are ideally suited for full output tone signaling where voice paging is not a requirement. Typical applications include emergency warning, start and dismissal, general alarm, smelters, and cranes.

c UL us

FEATURES

- Available in 250 Vdc
- Compatible with model UTM (Universal Tone Module)
- Produces 110 dBa at 10' (120 dBa at 1 m)
- Type 3R enclosure
- Indoor/outdoor use
- UL and cUL Listed

MODEL	VOLTAGE	OPERATING CURRENT	STANDBY CURRENT	DECIBELS 10'	1 m
300-250	250 Vdc	0.072 A	NA	110	120

SelecTone® 15 W Amplified Speakers (300)

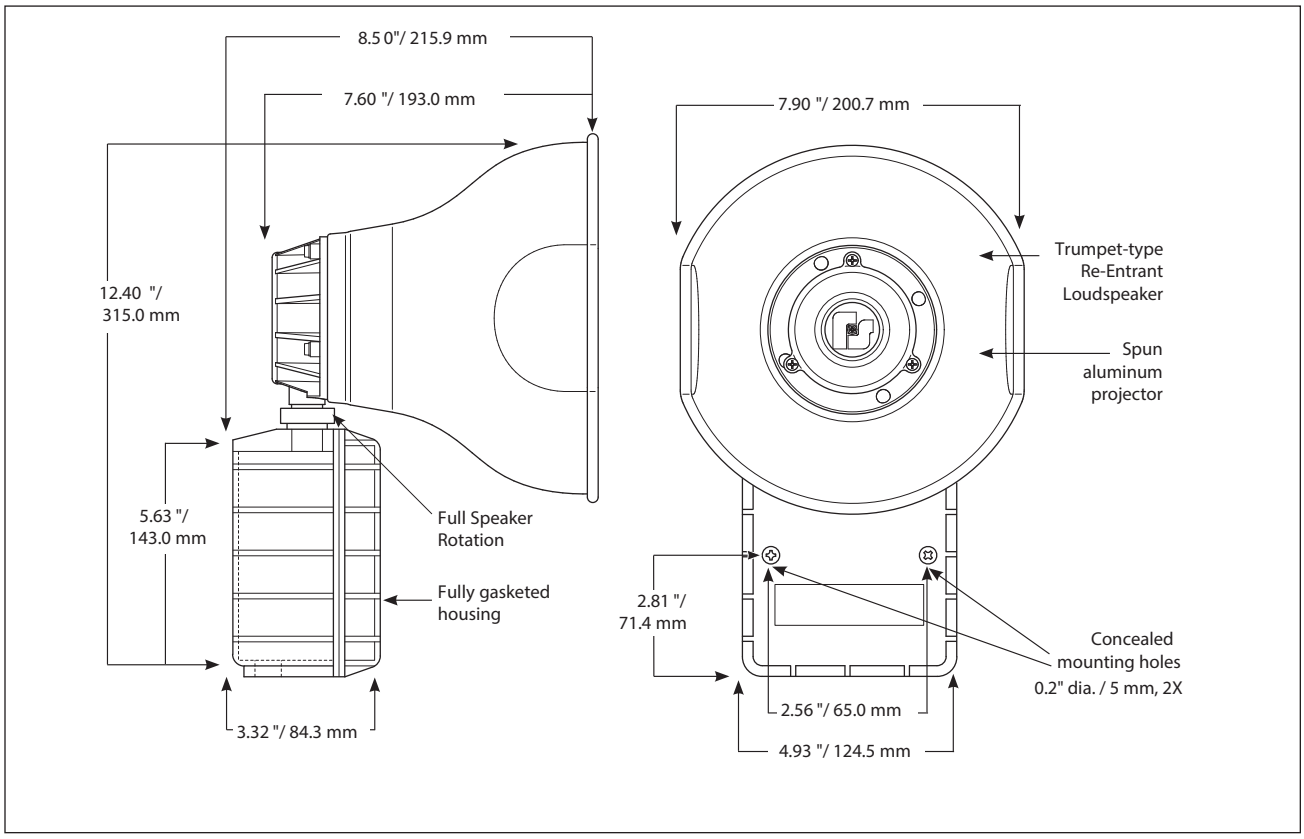

SPECIFICATIONS

Operating Temperature:	-31° to 151°F (-35° to 66°C)
Net Weight:	5.0 lb (2.3 kg)
Shipping Weight:	6.1 lb (2.8 kg)
Height:	12.40 in (315.0 mm)
Width:	7.90 in (200.7 mm)
Depth:	8.50 in (215.9 mm)

HOW TO ORDER

1. Select Model

2. Order Required Accessory (sold separately)

Universal Tone Module **UTM**

300 – 250

TYPE
300

VOLTAGE
250 (250 Vdc)

ACCESSORIES

Description	Part Number
Speaker Rotational Mounting Kit	**SEL-KIT-RS**

REPLACEMENT PARTS

Description	Part Number
PCBA, 250 Vdc	**K2001903B**
Voice Coil, Series C	**K8593035A**
Speaker Assembly	**K8593082A**