



► Model 371LED

Commander® LED Rotating Lights

Model 371LED warning lights have an array of 12 powerful LEDs arranged below a reflector. The reflector focuses the light from the LEDs into a high-intensity beam and rotates 360 degrees.

The LEDs, reflector, and motor module are sealed under a polycarbonate dome, which completes a watertight, dust-tight enclosure.

The 371LED base features electrostatically applied black powder coat for greater corrosion resistance. Wiring can be routed through the pipe-mount opening in the bottom of the light, or the two side knockouts can be used for side entry wiring. Installation can be surface or 1-inch NPT pipe mount. Optional wall and corner mount brackets are available.



LENS COLOR OPTIONS




FEATURES


- Available in 120 Vac
- 50,000-hour LED light source
- Surface mount and integrated 1-inch NPT pipe mount
- Type 4X, IP66 enclosure
- IP69K compliant
- UL and cUL Listed

MODEL	VOLTAGE	OPERATING CURRENT	REVOLUTION / MINUTE	LIGHT OUTPUT	MOUNT
371LED-120*	120 Vac 50/60 Hz	320 mA	60	15,000 cd	1-inch NPT Pipe/Surface

* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, (M) Magenta, or (R) Red

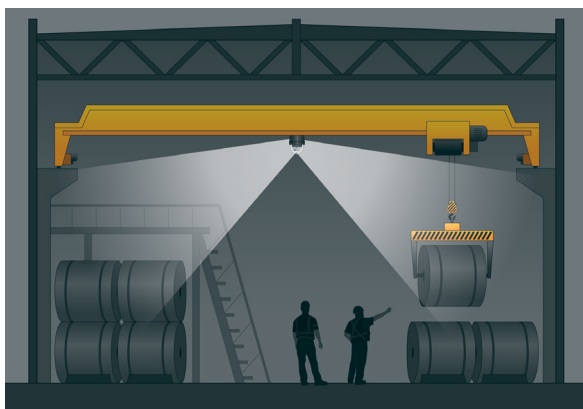


371LED/371LEDX is shipped from the factory with the standard reflector that creates a horizontal light beam that is 90 degrees from the vertical orientation, resulting in a wide light output distribution.

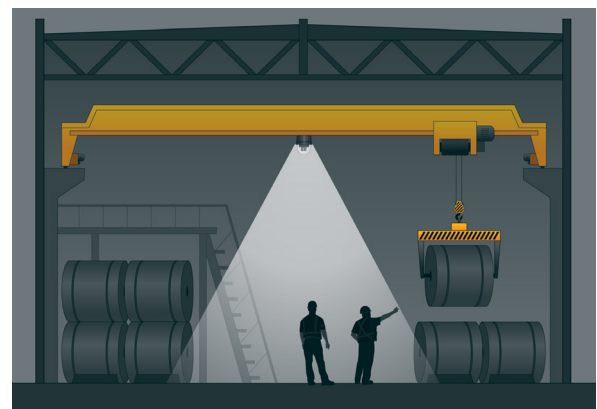

371LED with the 371LED-KIT-CR reflector installed reflects the light beam at 22.5 degrees from the vertical orientation, resulting in a focused light output.

Commander® LED Rotating Lights (371LED)

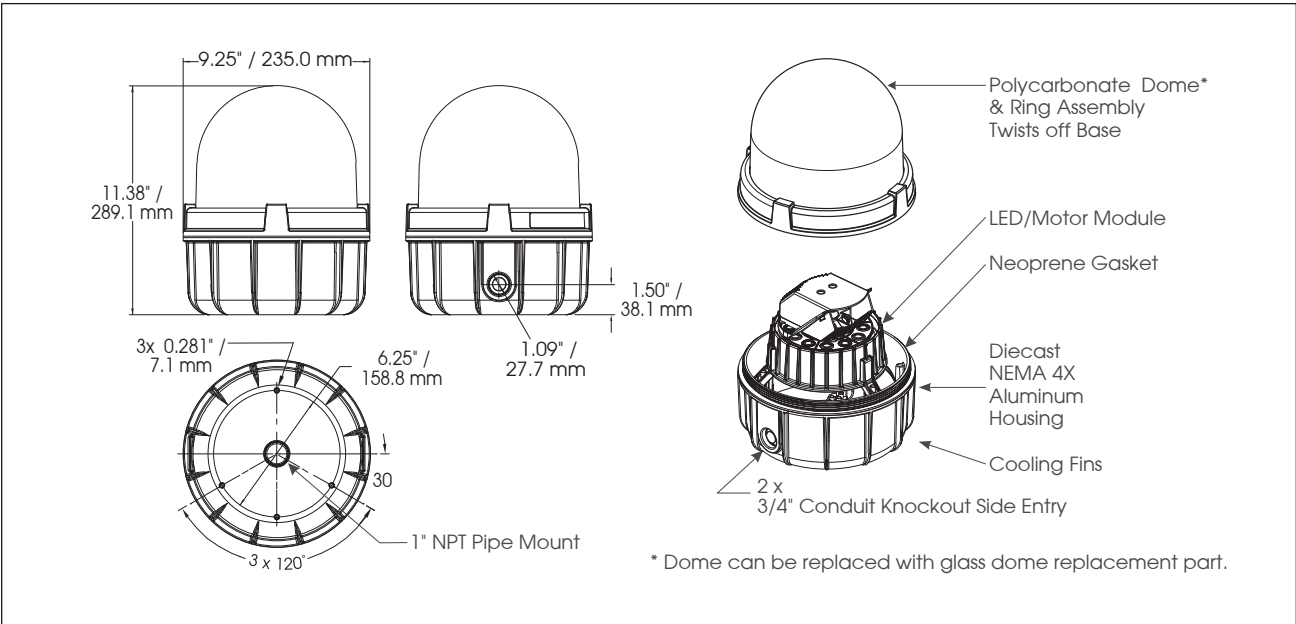

SPECIFICATIONS

Lamp Life:	50,000 Hours
Light Source:	LED
Operating Temperature:	-31° to 150°F (-40° to 66°C)
Net Weight:	7.1 lb (3.2 kg)
Shipping Weight:	8.1 lb (3.7 kg)
Height:	11.38 in (289.1 mm)
Diameter:	9.25 in (235.0 mm)

ACCESSORIES

Description	Part Number
Crane reflector kit, 22.5 degrees	371LED-KIT-CR
Wall Mount Bracket, 4X Rated	LSWB
Corner Mount Bracket, 3R Rated	LCMB2*
Solid Surface Mounting Bracket	371BRCKT
Shock Mount Kit	K8459A076C
3/4-inch Hub Kit	K8459138A

* LCMB2 is 3R Rated. In combination with a 4X unit, the product defaults to 3R.

HOW TO ORDER

371LED	-	120	A
TYPE 371LED		VOLTAGE 120 Vac 50/60 Hz	COLOR A Amber B Blue C Clear G Green M Magenta R Red

REPLACEMENT PARTS

Description	Part Number
Series B Dome and Ring Assembly	
Amber Polycarbonate ¹	K8459125A
Blue Polycarbonate ¹	K8459125A-01
Clear Polycarbonate ¹	K8459125A-02
Green Polycarbonate ¹	K8459125A-03
Red Polycarbonate ¹	K8459125A-04
Gasket, Surface Mount	K8459127A
LED/Motor Module, Amber	K8459159A-A
LED/Motor Module, Blue	K8459159A-B
LED/Motor Module, White	K8459159A-W
LED/Motor Module, Green	K8459159A-G
LED/Motor Module, Red	K8459159A-R

¹ Includes 1 dome gasket