



► Model USIX

UniStat® Hazardous Location LED Status Indicator

The UniStat® is a LED based, multi-color, single-high status indicator.

Using the latest LED technology, this status indicator can produce three colors (Amber, Green and Red) or four colors (Amber, Blue, Green and Red) from a single light source.

The UniStat offers a choice of four integrated flash patterns – steady burn, slow flash, strobe flash and SimuStrobe™. SimuStrobe simulates the attention-getting flash rate of a strobe light but with a much more color-rich output. The user can choose a total of 12 possible flash/color combinations in the tri-color models and 16 in the quad-color models.

The USIX is protected in a durable polycarbonate housing utilizing 4-3/4-inch knockout conduit openings in the surface mount base. The outer glass globe is protected by a polycarbonate dome guard (included). Each model arrives pre-assembled and ready to surface mount.

FEATURES

- Available in 24VDC and 120VAC
- Tri or quad-color models
- 50,000 hours, vibration-resistant LED light source
- Surface mount
- PLC compatible
- Type 4X, IP66 enclosure
- IP69K compliant
- UL and cUL Listed for Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G; Class III


| MODEL | DESCRIPTION | VOLTAGE | OPERATING CURRENT | MOUNT |
|-------------------|-------------|---------|-------------------|---------|
| USIX-024TC | Tri-color | 24VDC | 0.087 amps | Surface |
| USIX-120TC | Tri-color | 120VAC | 0.058 amps | Surface |
| USIX-024QC | Quad-color | 24VDC | 0.087 amps | Surface |
| USIX-120QC | Quad-color | 120VAC | 0.058 amps | Surface |

HAZARDOUS LOCATION RATING: USIX

T-CODE AT MAXIMUM AMBIENT TEMPERATURE, °C

| Hazardous Location | 40°C | 66°C |
|--|------|------|
| Class I, Division 2, Groups A, B, C, D | T6 | T5 |
| Class II, Division 2, Groups F, G | T6 | T6 |
| Class III | T6 | T6 |

UniStat® Hazardous Location LED Status Indicator (USIX)

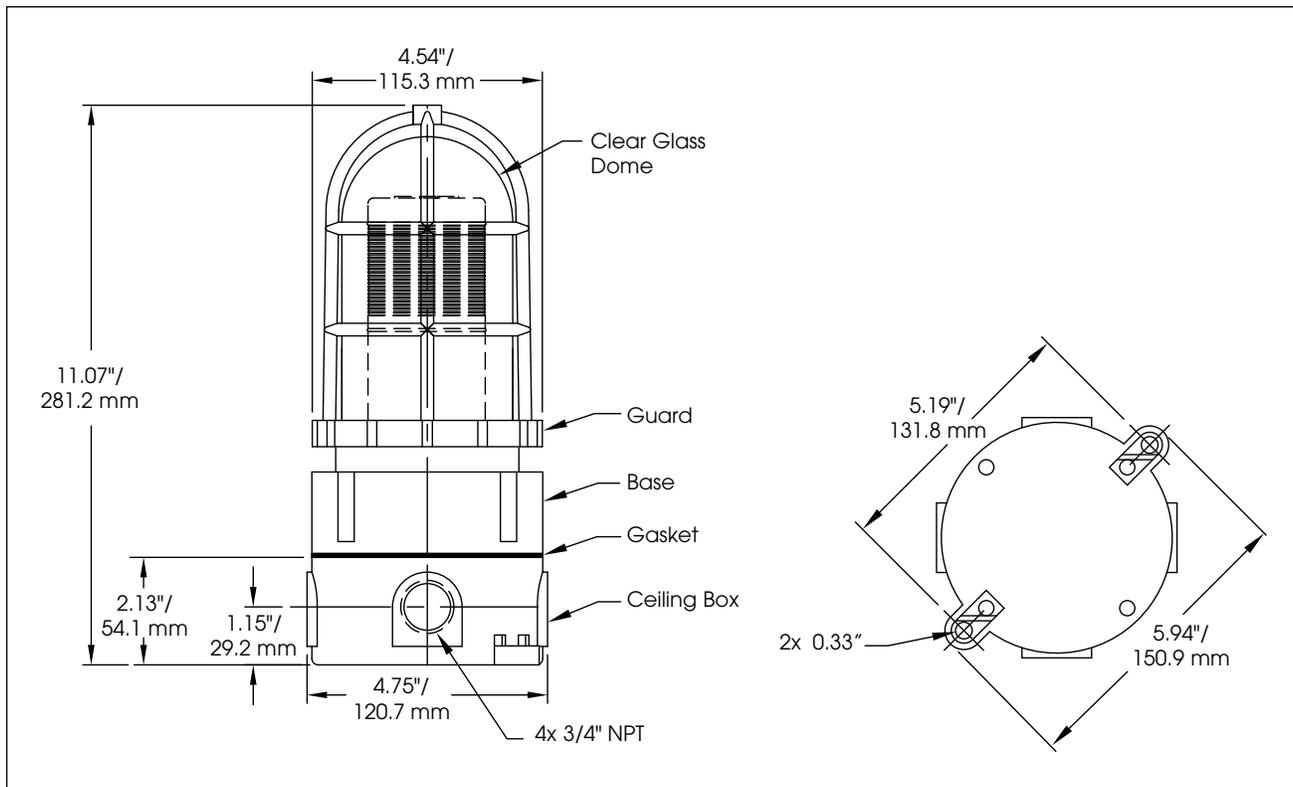

SPECIFICATIONS

| | | |
|------------------------|----------------|---------------|
| Lamp Life: | 50,000 Hours | |
| Light Source: | LED | |
| Operating Temperature: | -40°F to 150°F | -40°C to 66°C |
| Net Weight: | 2.49 lbs | 1.13 kg |
| Shipping Weight: | 2.53 lbs | 1.15 kg |
| Height: | 11.07" | 281.2 mm |
| Diameter: | 4.75" | 120.7 mm |

REPLACEMENT PARTS

| Description | Part Number |
|---|--------------|
| MicroStat UniStat Hardware Kit ¹ | K844700351A |
| LED Tri-color | K2005328A |
| LED Quad-color | K2005328A-01 |

¹ Includes 1 lens of each color, cap, o-ring, and MicroStat light barrier

HOW TO ORDER

