

► Model MPEX

Explosion-Proof Fire Alarm Pull Stations




The model MPEX Explosion-Proof Pull Station is designed for hazardous locations where flammable gases, vapors, combustible dusts, or easily ignitable fibers are present. The unique swing-up front cover exposes a pull-down ring that activates the alarm; this two-step process prevents accidental activation. MPEX is reset by pressing the shaft and returning the plate to its original position.

The enclosure is made of copper-free cast aluminum alloy.

F E A T U R E S

- Contacts on the unit are rated 120 Vac, 60 Hz at 6 A continuous
- Highly visible red enclosure
- Lift cover and pull down ring to activate
- (2) 3/4-inch conduit entries
- UL and cUL Listed for Class I, Division 1, Groups C and D; Class II, Division 1, Groups E, F and G; Class III
- NEMA 7 for Groups C and D and NEMA 9 for Groups E, F and G
- UL Fire Listed and ULC Fire Listed

Explosion-Proof Fire Alarm Pull Stations (MPEX)

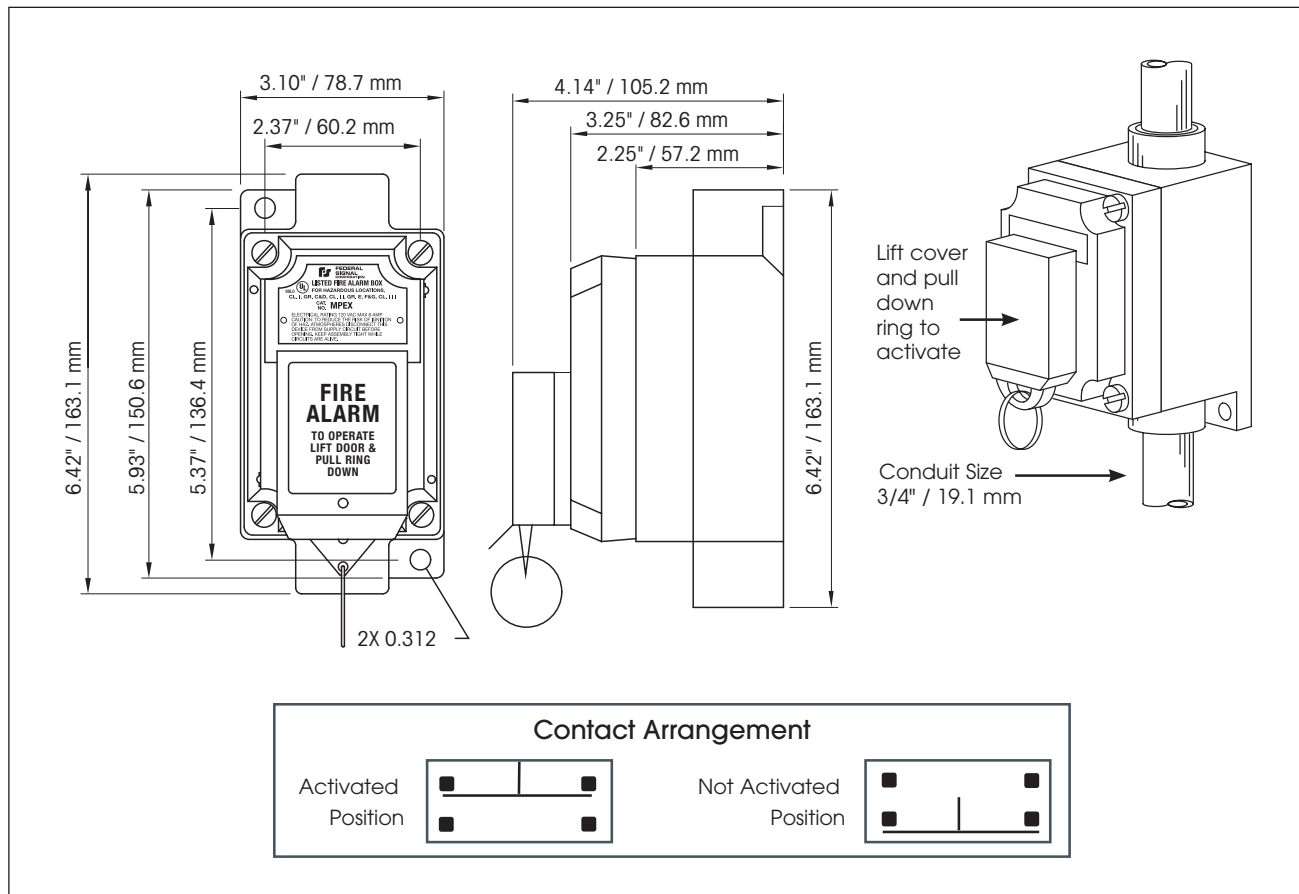

SPECIFICATIONS

Operating Temperature:	-13° to 104°F	-25° to 40°C
Net Weight:	2.4 lb	1.09 kg
Shipping Weight:	2.7 lb	1.23 kg
Height:	6.42"	163.1 mm
Width:	3.10"	78.7 mm
Depth:	4.14"	105.2 mm

HOW TO ORDER

Specify Model:

MPEX – Explosion-Proof Pull Station