


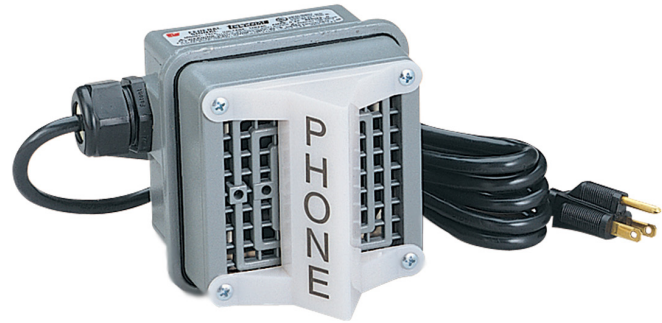

► Model TELC

TelCom® Telephone Extension Ringer Horn and Strobe Combinations

The model TELC Extension Ringer Combination Horn/Strobe can be activated by a telephone system ringing signal. TELC is specifically designed for use with an analog telephone. The ringing signal of 40-150 Vac, 16-60 Hz and local 120 Vac power is all that is required to activate this model.

This TelCom® device is intended to be mounted on a vertical surface, such as a rigid wall or post. The TELC has a three-conductor, six-foot, 120 Vac power cord extending from the unit. Connecting the TelCom device to the telephone network is accomplished by running a modular telephone line cord (RJ11) to an existing jack or a duplex jack (customer-supplied) into an existing modular jack. The TELC is designed with a durable zinc diecast housing painted with Gray powder coat enamel, and feature an internal solid-state relay.

This combination audible/visual signal features the Vibratone® horn and a three-dimensional strobe to notify when the telephone rings.

TelCom devices are designed for high ambient noise areas, such as manufacturing facilities, machine and sheet metal shops. They are also useful in large open areas such as a warehouse, loading dock or a large office.


FEATURES

- Available in 120 Vac
- Horn and strobe signals an incoming call
- Activated by ringing voltage (analog telephone only)
- 100 dBa signal at 10' (110 dBa at 1 m)
- Type 1 enclosure
- CSA Certified
- UL Listed for indoor use

MODEL	VOLTAGE	OPERATING CURRENT	DECIBELS		FLASH RATE PER MINUTE	CANDELA PEAK ¹
			10'	1 m		
TELC-120	120 Vac	0.24 A	100	110	80	108,000

¹ Peak candela is the maximum light intensity generated by a flashing light during its light pulse

TelCom® Telephone Extension Ringer Horn and Strobe Combinations (TELC)

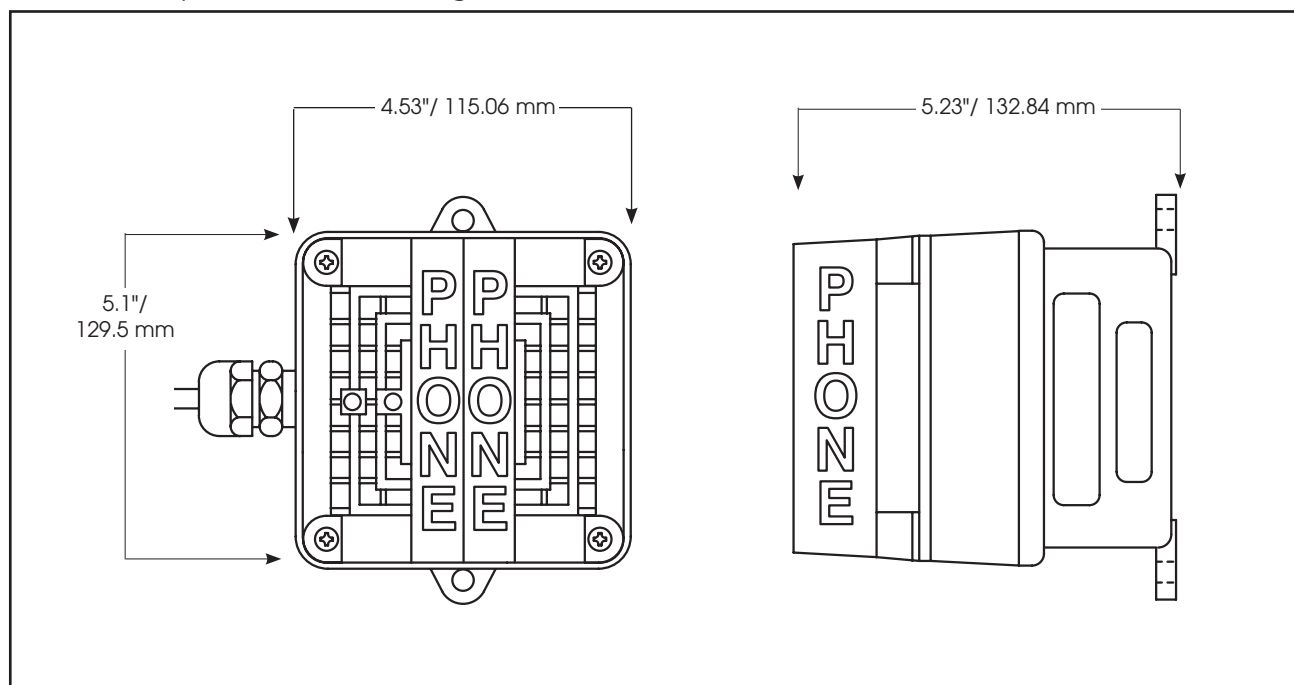

SPECIFICATIONS

Operating Temperature:	32° to 112°F	0° to 44°C
Ringing Signal:		90 Vac, 20 Hz
Ring Detection:		15.8-60 Hz, 40-150 Vac
Humidity Range (Storage and Operating):		0 to 85% R.H, noncondensing
Net Weight:	3.0 lb	1.36 kg
Shipping Weight:	3.4 lb	1.54 kg
Height:	5.10"	129.54 mm
Width:	4.53"	115.06 mm
Depth:	5.23"	132.84 mm

HOW TO ORDER

Specify Model:

TELC-120 – TelCom® combination strobe and horn, 120 Vac

OPTIONAL ACCESSORIES

Description	Part Number
Electro-Mechanical Rotational Mounting Kit	EM-KIT-RS