

► Model 52

Resonating Horn

Model 52 resonating horn is ideal for penetrating high ambient noise levels. Being electrically activated, Model 52 does not require an expensive air compressor for operation. It is able to withstand the shocks, vibrations, dust, and atmospheric conditions encountered in off-road use.

Rubber gaskets and a power connector make Model 52 completely watertight. The projector and internal parts are made to resist corrosion; the exterior is sealed with gray, enamel paint, and the housing is diecast aluminum. Model 52 has a duty cycle of five minutes on and five minutes off.


Used by many major manufacturers of construction equipment, Model 52 resonating horns suit the warning needs of any off-road vehicle working in a high noise environment.

FEATURES

- Available in 24 Vdc
- Withstands extreme outdoor conditions
- Produces 114 dBa at 10' (124 dBa at 1 m) with 1,000 ft. range
- Shock and vibration tolerant
- Surface mount with flanges
- Type 3R enclosure

MODEL	VOLTAGE	OPERATING CURRENT	DECIBELS	
			10'	1M
52-024-1	24 Vdc	4.0 A	114	124

Resonating Horn (52)

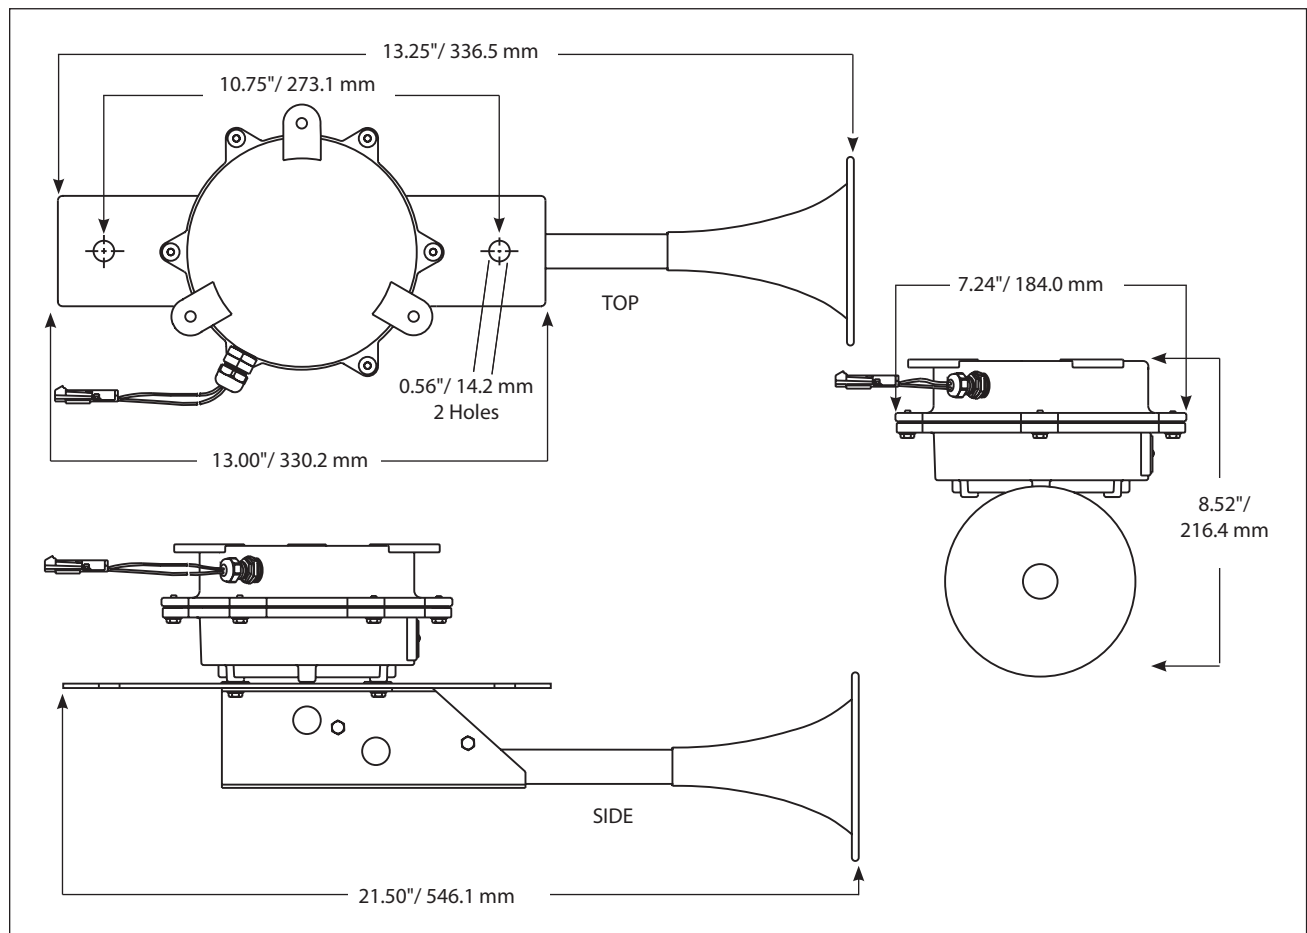

SPECIFICATIONS

Operating Temperature:	-40° to 185°F	-40° to 85°C
Duty Cycle:	5 minutes ON/5 minutes OFF	
Net Weight:	9.0 lb	4.1 kg
Shipping Weight:	10.0 lb	4.5 kg
Height:	8.5"	215.9 mm
Width:	6.6"	168.4 mm
Depth:	21.6"	548.6 mm

HOW TO ORDER

Specify Model:

52-024-1 – Resonating Horn, 24 Vdc