



► Models 55 and 56

Resonating Horns

Models 55 and 56 are resonating horns that produce sound by means of a diaphragm, which resonates a column of air. With greater output than a vibrating horn, the resonating horn can be used wherever a louder, more powerful alert is needed.

These projectors are designed to match the frequency of the vibrating diaphragm to produce a smooth tone. The housings are tapped for 1/2" conduit.

Models 55 and 56 have sufficient output to penetrate through high ambient noise levels and have a duty cycle of five minutes on, five minutes off.




FEATURES

- Model 55 - 24 Vac and 120 Vac
- Model 56 - 24 Vdc, 125 Vdc and 250 Vdc
- Model 55 produces 105 dBA at 10' (115 dBA at 1 m)
- Model 56 produces 112 dBA at 10' (122dBA at 1 m)
- Corrosion-resistant cast aluminum housing and spun brass projector
- Indoor/outdoor use
- Weatherproof, water- and dust-tight
- Swivel bracket included
- Type 3R enclosure
- Model 55-120-1 is UL Listed and CSA Certified

MODEL	VOLTAGE	OPERATING CURRENT	DECIBELS	
			10'	1 M
55-024-1	24 Vac 60 Hz	3.00 A	105	115
55-120-1	120 VacC 60 Hz	0.75 A	105	115
56-024-1	24 Vdc	3.00 A	112	122
56-125-1	125 Vdc	0.25 A	112	122
56-250-1	250 Vdc	0.25 A	112	122

Resonating Horns (55 and 56)

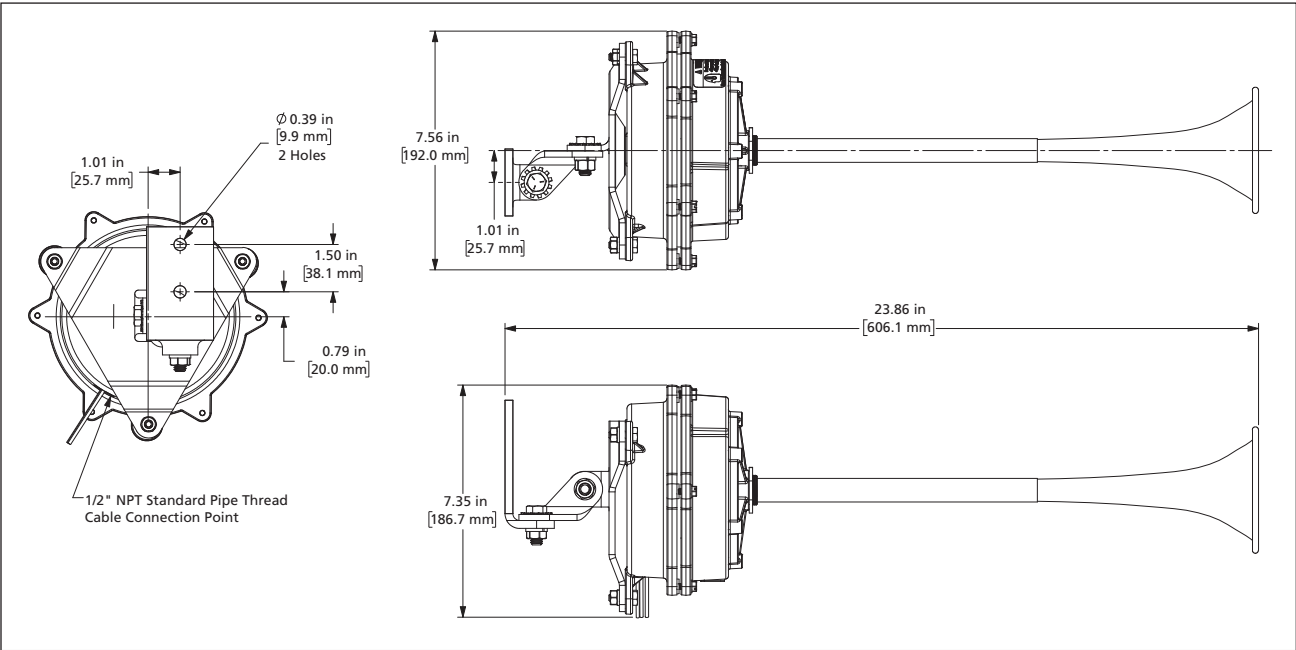

SPECIFICATIONS

Operating Temperature:	-35° to 150°F (-37° to 66°C)
Duty Cycle:	5 minutes on/5 minutes off
Net Weight:	5.0 lb (2.3 kg)
Shipping Weight:	6.2 lb (2.8 kg)
Height:	7.56 in (192.00 mm)
Width:	7.56 in (192.00 mm)
Length:	23.86 in (606.10 mm)

REPLACEMENT PARTS

Description	Part Number
Projector	K8283C071-0G
Mounting Bracket and Bulk Head	K8233A046-0G
Accessory Kit	

HOW TO ORDER

55	-	024	-	1
TYPE 55		VOLTAGE 024 (24 Vac) 120 (120 Vac)		
56	-	250	-	1
TYPE 56		VOLTAGE 024 (24 Vdc) 125 (125 Vdc) 250 (250 Vdc)		