



► Model UVLOC

UltraVoice® UVLOC Local Operating Console

The Federal Signal UltraVoice® Local Operating Console (UVLOC) is an easy to use remote user interface for indoor and outdoor alert and notification systems. The UVLOC provides a system operator, building inhabitant or facility personnel, an activation point that emulates the functions and capabilities of the UltraVoice controller series. The UVLOC offers the capability to: activate seven tone or pre-recorded digital voice messages, record/play a live voice message, and conduct live public address (PA) announcements. The UltraVoice Local Operating Console is ideal for providing multiple activation points in an Indoor Mass Notification System.

The UVLOC is rated for Indoor use and can be surface or recessed mounted. Up to ten UVLOC's can be easily interfaced into an UltraVoice controller, as each UVLOC is hard-wired utilizing standard CAT5 cable and battery operated from its respective UV controller. The ability to provide up to ten remote activation points offers flexibility in large facilities while battery operation increases the system reliability by insuring operation when AC power fails.


Outfitted with onboard LED's, the UVLOC indicates when the unit is armed and powered. In addition, arming the UVLOC signals the Federal Commander Digital System, alerting operators that the unit has been activated for use.

Designed to enhance "all hazard" warning capabilities, the UVLOC provides increased system flexibility, redundancy, and reliability, making it a necessary component to any alert and notification system.

FEATURES

- Battery operation
- On-board noise cancelling microphone
- Provides alarm status when armed
- 7 messages, plus play and record capability

Ultravoice® Local Operating Console (UVLOC)

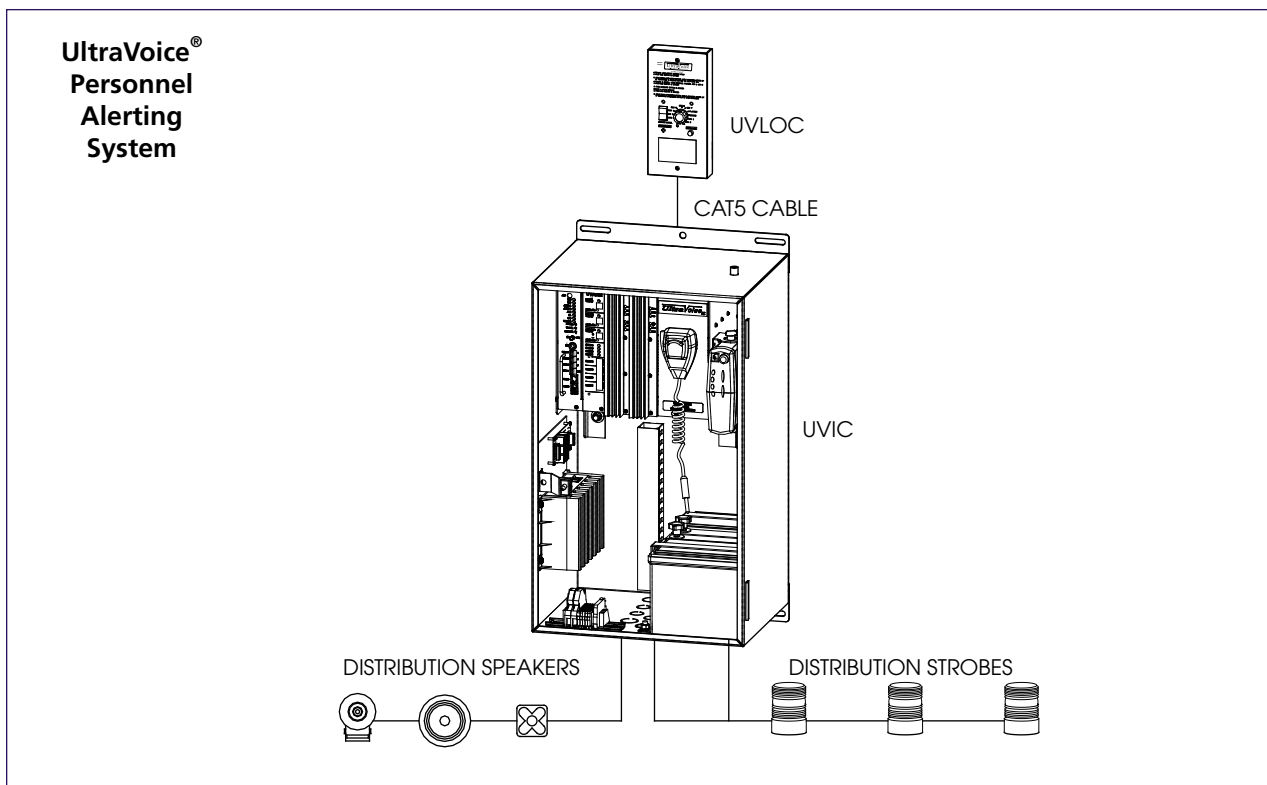

SPECIFICATIONS

Operating Temperature: Indoor use, non condensing humidity	-22°F to 149°F -30°C to 65°C
Local Operation Console Operating Voltage:	20-32 VDC
Operating Current:	<25 mA
Local Operating Console-Interface Module:	20-32 VDC
Operating Current:	< 50 mA
Audio Output:	600 Ohm balanced, adjustable 700mVpp to 5Vpp
Installation Specifications:	
Interface Cable Type	CAT5, 4 pairs
Maximum distance between UVLOC and UV Controller	Approx. half mile of cable, ≤ 200 Ohms of cable
Maximum# of UVLOC's per UV Controller	(10) (external wire management required)
Dimensions H x W x D:	10" x 4.75" x 3" 254 mm x 120.65 mm x 76.2 mm

HOW TO ORDER

Contact our Federal Signal Sales Engineers to design a system that meets your specific requirements.

Description	Part Number
Maximum of (10) units can be interfaced to a UltraVoice Siren Controller (UV) or UltraVoice Indoor Controller (UVIC)	UVLOC
One (1) Interface module must be ordered per UV or UVIC	UVLOC-IM

*Cabling is not included with any mode