

- Model LP3SL, LP3PL, LP3TL, and LP3ML

StreamLine® Low Profile Steady Burning LED Lights



Model LP3L low profile LED light is offered in four mounting configurations: LP3PL with an integrated 1/2-inch NPT pipe mount, LP3ML featuring an integrated 1/2-inch NPT male pipe mount, LP3TL featuring a T-formation base with two mounting holes for wall or flush mounting, and the LP3SL featuring a three-hole surface mounting configuration.

Models LP3ML, LP3SL, and LP3TL include a surface mount gasket to complete the Type 4X installation. An optional dome guard is available for use with the LP3ML, LP3SL and LP3TL when installed on a panel.

All models include the vibration-resistant, double-contact, bayonet-style 50,000-hour LED module.

StreamLine® products are designed for OEM applications.



LENS COLOR OPTIONS



FEATURES


- Available in 24 Vdc and 120 Vac
- T-mount (TL), integrated 1/2-inch NPT pipe mount (PL), 1/2-inch NPT male pipe mount (ML), or surface mount (SL)
- Five lamp/lens colors: Amber, Blue, Clear, Green, and Red
- 50,000-hour LED
- Screw-on lens
- Indoor/outdoor use
- Optional wire lens guard
- Type 4X, IP66 enclosure – LP3SL, LP3PL, LP3ML
- Type 4X, IP55 enclosure – LP3TL
- IP69K compliant – LP3SL, LP3PL, LP3ML
- PLC compatible
- CSA Certified
- UL and cUL Listed
- CE and UKCA certified

MODEL	VOLTAGE	OPERATING CURRENT
LP3* L-024**	24 Vdc	0.15A
LP3* L-120**	120 Vac	0.06A

* Indicates Mounting Style: (S) Surface Mount, (P) Pipe Mount, (T) T-Mount, or (M) Male Pipe Mount

** Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, or (R) Red

StreamLine® Low Profile Steady Burning LED Lights (LP3SL, LP3PL, LP3TL, and LP3ML)

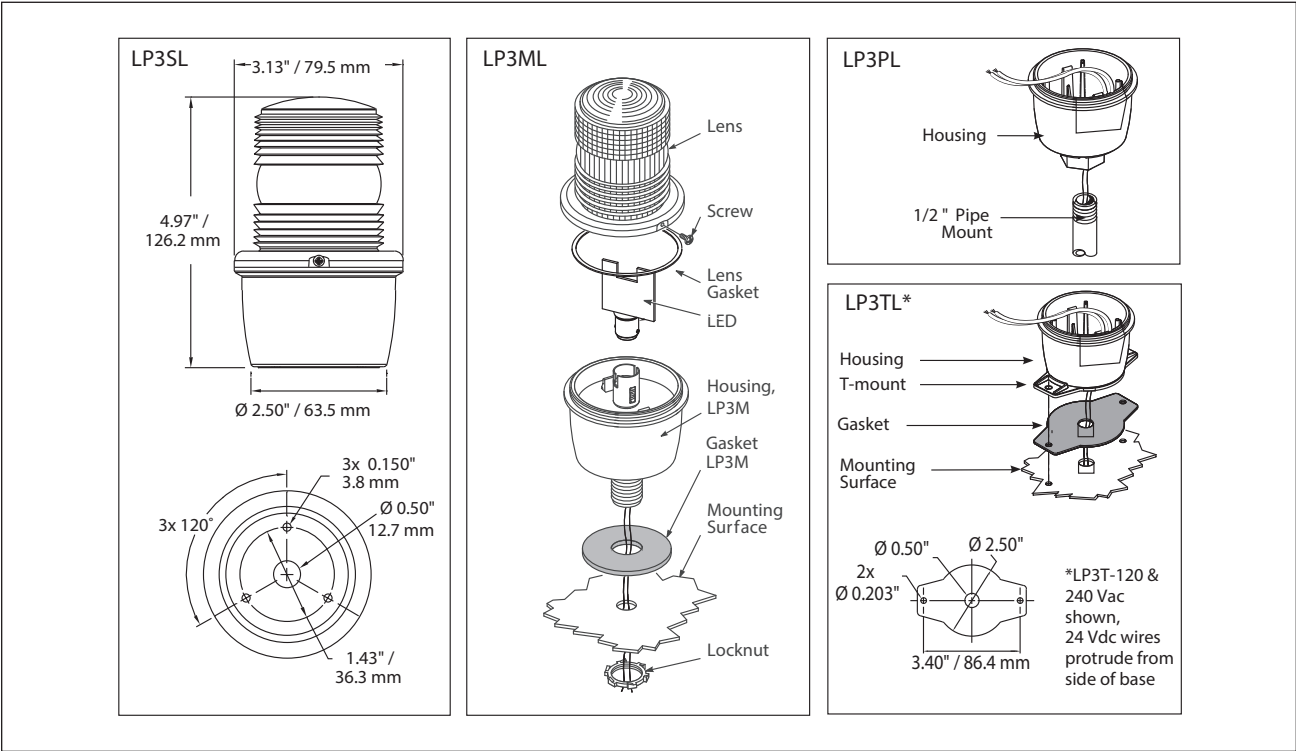

SPECIFICATIONS

Lamp Life:	50,000 Hours
Light Source:	LED
Operating Temperature:	-31° to 150°F (-35° to 65°C)
Net Weight:	0.46 lb (0.21 kg)
Shipping Weight:	0.53 lb (0.24 kg)
Height (from bottom):	
LP3PL	5.7 in (144.8 mm)
LP3ML	5.8 in (147.3 mm)
LP3TL	5.1 in (129.5 mm)
LP3SL	4.97 in (126.2 mm)
Diameter:	3.13 in (79.5 mm)

ACCESSORIES

Description	Part Number
Wire guard (compatible with S, T, and M mounts only)	LP3G
Wall Mount "L" Bracket kit	WMBRKT



LP3G

HOW TO ORDER

TYPE	MOUNT	VOLTAGE	COLOR
LP3	S Surface P Pipe T T-Mount M Male Pipe	024 (24 Vdc) 120 (120 Vac)	A Amber B Blue C Clear G Green R Red

REPLACEMENT PARTS

Description	Part Number
LED Module, 24 Vdc	K14702254A
LED Module, 120 Vac	K14702196A
Lens, Amber	K8589063A
Lens, Blue	K8589063A-01
Lens, Clear	K8589063A-02
Lens, Green	K8589063A-03
Lens, Red	K8589063A-04
Gasket Kit ¹	K858900353A

¹ Includes (1) lens gasket and (2) mounting gaskets for LP3SL and LP3TL