

LED



Model SLM300 and SLM350 shown with mounting base options (ordered separately)

StreamLine® Modular Multifunctional Low Profile LED Beacon

Model SLM300 and SLM350

MULTIFUNCTIONAL LED BEACON AVAILABLE IN A PROXIMITY OR DIRECTIONAL LENS

- Compatible with 12-24VAC/DC or 120-240VAC*
- Steady, flashing or strobe mode
- 100,000 hour LED
- Four mounting base options
- Type 4X, IP66
- CE Compliant
- UL and cUL listed

*Voltage is dependent on selected base.

Models SLM300 and SLM350 offer a multifunctional LED beacon with high optical performance. Developed with a multiple input technology, these models offer three separate light effects (steady, flashing or strobe) controllable via independent electric contacts. The steady light option offers a consistent and conspicuous light source. The flashing mode consists of a triple-flash strobe effect, while the strobe effect is a 5x flash, that's ideal for applications where gaining attention is a must.

Model SLM300 includes an opaque lens for signaling in close proximities. Model SLM350 includes a fresnel lens for long distance signaling. Both are available in five colors: Amber, Blue, Clear, Green and Red. This unit includes a same colored lens with light source that increases light optimization for a rich intense light output.

Four mounting options are available: shallow or deep base and single or double wall mount.

The body material is a self extinguishing polycarbonate material with high impact and UV resistance suitable for outdoor applications. An optional stainless steel heavy-duty protection grid is available as an accessory. This unit is rated Type 4X, IP66 and is CE, UL and cUL listed.

Model	Voltage	Lens	Flash Rate/ Minute (Flash Mode)	Flash Rate/ Minute (Strobe Mode)
SLM300*	12-24VAC/DC or 120-240VAC	Opaque	105 (+/-10)	72 (+/-10)
SLM350*	12-24VAC/DC or 120-240VAC	Fresnel	105 (+/-10)	72 (+/-10)

Maximun Operating Current (mA)					
12 VDC	24 VDC	12 VAC	24 VAC	120 VAC	240 VAC
180	110	300	270	80	55


* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green or (R) Red



STREAMLINE® MODULAR MULTIFUNCTIONAL LOW PROFILE LED BEACON (SLM300/SLM350)

SPECIFICATIONS



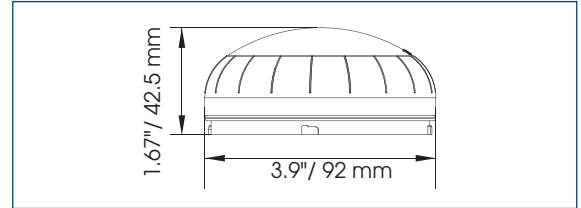

Lamp Life:	100,000 Hours	100,000 Hours
Light Source:	LED Array	LED Array
Operating Temperature:	-22°F to 122°F	-30°C to 50°C
Weight (unit(s) + base = total weight)		
SLM300 and SLM350	3.88 oz.	0.11 kg
Shallow Base	2.12 oz.	0.06 kg
Deep Base		
12-24 VDC/AC	4.23 oz.	0.12 kg
120-240 VAC	6.0 oz.	0.17 kg
Wall Mount		
12-24 VDC/AC	6.70 oz.	0.19 kg
120-240 VAC	8.47 oz.	0.24 kg
Twin Wall Mount		
12-24 VDC/AC	9.17 oz.	0.26 kg
120-240 VAC	12.35 oz.	0.35 kg



HOW TO ORDER

- Specify model number SLM300 and color for Opaque Lens or SLM350 and color for Fresnel Lens
- Specify required mounting base (see chart)
- Optional dome guard
 - For shallow mounting base (SLMDG0)
 - For deep mounting base (SLMDG1)
- Accessories for Twin and Wall Mount Bases
 - Cable Gland, M20, Gray, 2 Pack (K77700416)
 - Cable Gland, M20, Red, 2 Pack (K77700416-01)

MOUNTING BASE OPTIONS

		Model Number	Base Color	Voltage		
 Shallow Base		SLMBS-012-024GY	Grey	12-24VDC/AC		
 Deep Base		SLMBD-012-024GY	Grey	12-24VDC/AC		
		SLMBD-012-024R	Red	12-24VDC/AC		
		SLMBD-120-240GY	Grey	120-240VAC		
		SLMBD-120-240R	Red	120-240VAC		
 Wall Mount		SLMBW-012-024GY	Grey	12-24VDC/AC		
		SLMBW-120-240GY	Grey	120-240VAC		
 Twin Wall Mount		SLMBT-012-024GY	Grey	12-24VDC/AC		
		SLMBT-120-240GY	Grey	120-240VAC		