

## INSTALLATION INSTRUCTIONS FOR DEUTSCH STYLE STROBE POWER CABLE KITS

### SAFETY MESSAGE TO INSTALLERS

People's lives depend on your safe installation of our products. It is important to read, understand and follow all instructions shipped with the products. In addition, listed below are some other important safety instructions and precautions you should follow:

- To properly install this kit: you must have a good understanding of automotive electrical procedures and systems, along with proficiency in the installation and use of safety warning equipment.
- When drilling into a vehicle structure, be sure that both sides of the surface are clear of anything that could be damaged. Remove all burrs from drilled holes. To prevent electrical shorts, grommet all drilled holes through which wiring passes.
- Locate light control so the VEHICLE and CONTROL can be operated safely under all driving conditions.
- File these instructions in a safe place and refer to them when maintaining and/or reinstalling the product.

Failure to follow all safety precautions and instructions may result in property damage, serious injury, or death to you or others.

### A. KIT CONTENTS LIST.

Qty.	Description
1	Cable with connector

### B. INSTALLATION.

When selecting a mounting location for the power supply unit and strobe heads, it is necessary to keep in mind that some strobe heads are supplied with 4-feet of cable exiting the unit and others are supplied with a 6-inch wire pigtail. Plan all wiring and cable routing before performing any installation. Additional terminated cable lengths are available in 5-foot increments. See your local dealer for model numbers.

### WARNING

Failure to observe this WARNING may result in fire, burns or blindness.

If shorted to vehicle frame, high current conductors can cause hazardous sparks resulting in electrical fires or molten metal.

DO NOT connect this system to vehicle battery until ALL other electrical connections are made and mounting of all components is complete.

Verify that no short circuits exist, before making connection to the vehicle battery.

1. Disconnect vehicle battery. Ensure that power is disconnected from all vehicle lighting control systems.
2. Ensure that the power supply chassis is grounded to the vehicle chassis. If necessary, connect a wire from the power supply chassis (mounting screw) to a known good vehicle chassis ground.

3. Connect the strobe tube cables to the strobe tube unit(s). Route the cables to the power supply. Allow for a drain loop for maintenance, and cut the cable to the proper length, if required.

4. To complete the installation, proceed as follows:

- a. See figure 1. Ensure that the red, white, and black wires are inserted into the proper connector position. Insert the terminated wires into the quick connect housing and push until they snap into place.
- b. Plug the quick connector into the power supply.
- c. Check all connections and wiring. Ensure that there are no short circuits and that all wires are protected from any sharp edges. Reconnect the vehicle battery. Test for proper operation of the strobe system.

### SAFETY MESSAGE TO OPERATORS

Peoples' lives depend on your safe use of our products. Listed below are some important safety instructions and precautions you should follow:

- Do not attempt to activate or deactivate light control while driving in a hazardous situation.
- Although your warning system is operating properly, it may not be completely effective. People may not see or heed your warning signal. You must recognize this fact and continue driving cautiously.
- Also, situations may occur which obstruct your warning signal when natural or man-made objects are between your vehicle and others, such as: raising your hood or trunk lid. If these situations occur, be especially careful.
- At the start of your shift, you should ensure that the light is securely attached and all lamps are operating properly.
- If a selected function does not perform properly or if any of the lamps remain illuminated when the control is off, disconnect the power connector from the control unit and contact the nearest service center.

Failure to follow these safety precautions may result in property damage, serious injury, or death to you, to passengers, or to others.

### RETAIN AND REFER TO THIS MESSAGE

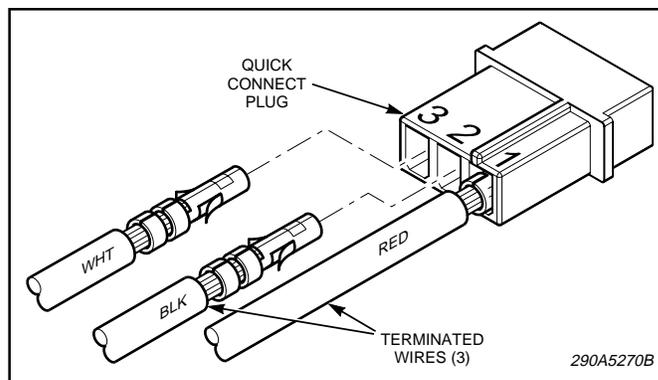


Figure 1.