

ICON_™ Series Work Light

Area/Flood Light



FEATURES

- High-powered LED work light available in round or square housing
- Die-cast aluminum housing and polycarbonate lens
- 1100 2700 lumens
- Adjustable vertical and horizontal mounts
- Stainless steel U-bracket and hardware
- 12/24 Vdc
- Three-year warranty


ICON[™] Series LED truck Work Lights provide effective illumination wherever work takes you. They are available in both round and square housings, as well as in a variety of brightnesses, ranging from 1100 to 2700 lumens.

Service truck work lights are expected to perform regardless of weather conditions, and the ICON Series utility truck work lights deliver. They're mounted using stainless steel U-brackets and are IP67 rated against dust and water, meaning that these lights are prepared to work when you do, rain or shine. The ICON Series LED Work Lights also come with a three-year warranty.

Durability and brightness make the ICON Series LED truck work light an excellent choice for a wide variety of industries. These lights would prove a valuable addition to tow trucks, construction vehicles, service trucks, or on any work vehicle operating in low light conditions. Common industry applications include towing, field service, utility/maintenance, along with countless others.


APPROVALS


- RoHS
- CE
- CISPR 25 Class 3
- IP67

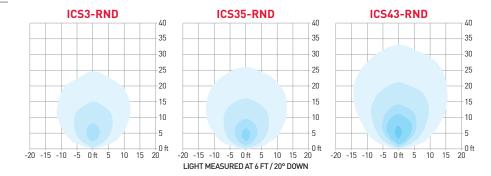




Level	fc	Color
1	0.25	
2	1	
3	3	
4	5	
5	10	
6	25	
7	40	









HOW TO ORDER

LED Color Lens Color

ICS3-RND 3-inch, 1100 Lumen, Round ICS3-SQ 3-inch, 1100 Lumen, Square ICS35-RND 3.5-inch, 1440 Lumen, Round ICS35-SQ 3.5-inch, 1330 Lumen, Square ICS43-RND 4.3-inch, 2200 Lumen, Round ICS43-SQ 4.3-inch, 2700 Lumen, Square

SPECIFICATIONS

SI EURIOATIONS								
	ICS3-RND	ICS3-SQ	ICS35-RND	ICS35-SQ	ICS43-RND	ICS43-SQ		
LUMENS	1100 lm	1100 lm	1440 lm	1330 lm	2200 lm	2700 lm		
CURRENT DRAW	0.8 A @ 12 Vdc 0.4 A @ 24 Vdc	0.8 A @ 12 Vdc 0.4 A @ 24 Vdc	1.1 A @ 12 Vdc 0.6 A @ 24 Vdc	1.1 A @ 12 Vdc 0.6 A @ 24 Vdc	1.7 A @ 12 Vdc 0.9 A @ 24 Vdc	1.7 A @ 12 Vdc 0.9 A @ 24 Vdc		
OPERATING VOLTAGE		12/24 Vdc						
OPERATING TEMP		-22° to +140° F (-30° to +60° C)						
PHYSICAL SPEC	CIFICATIONS							
LENGTH	3.1 in (7.9 cm)	3.0 in (7.6 cm)	3.6 in (9.1 cm)	3.5 in (9.0 in)	4.5 in (11.4 cm)	4.4 in (11.2 cm)		
WIDTH	1.2 in (3.0 cm)	1.0 in (2.5 cm)	1.3 in (3.3 cm)	1.2 in (3.0 cm)	1.6 in (4.1 cm)	1.4 in (3.6 cm)		
HEIGHT	3.9 in (9.9 cm)	3.8 in (9.7 cm)	4.4 in (11.2 cm)	4.4 in (11.2 cm)	5.2 in (13.2 cm)	5.3 in (13.5 cm)		
SHIP WEIGHT								
	0.6 lb (0.3 kg)	0.7 lb (0.3 kg)	0.9 lb (0.4 kg)	0.9 lb (0.4 kg)	1.4 lb (0.6 kg)	1.5 lb (0.7 kg)		

