



► Model TELC

# TelCom® Telephone Extension Ringer Horn and Strobe Combination

Model TELC Extension Ringer Combination Horn/Strobe can be activated by a telephone system ringing signal. TELC is specifically designed for use with an analog telephone. The ringing signal of 40-150VAC, 16-60Hz and local 120VAC power is all that is required to activate this model.

This TelCom® device is intended to be mounted on a vertical surface such as a rigid wall or post. The TELC has a three-conductor, six-foot, 120VAC power cord extending from the unit. Connecting the TelCom device to the telephone network is accomplished by running a modular telephone line cord (RJ11) to an existing jack or a duplex jack (customer supplied) into an existing modular jack. The TELC is designed with a durable zinc die-cast housing painted with gray powder coat enamel, and feature an internal solid-state relay.

This combination audible/visual signal features the Vibratone® horn and a three-dimensional strobe to notify when the telephone rings.

TelCom devices are designed for high ambient noise areas such as manufacturing facilities, machine and sheet metal shops. They are also useful in large open areas such as a warehouse, loading dock or a large office.


## FEATURES

- Available in 120VAC
- Horn and strobe signals an incoming call
- Activated by ringing voltage (analog telephone only)
- 100 dBa signal @ 10' (110 dBa @ 1m)
- Type 1 enclosure
- CSA Certified
- UL Listed for indoor use

MODEL	VOLTAGE	OPERATING CURRENT	DECIBELS		FLASH RATE PER MINUTE	CANDELA PEAK <sup>1</sup>
			10'	1M		
<b>TELC-120</b>	<b>120VAC</b>	<b>0.24 amps</b>	<b>100</b>	<b>110</b>	<b>80</b>	<b>108,000</b>

<sup>1</sup> Peak candela is the maximum light intensity generated by a flashing light during its light pulse

## TelCom® Telephone Extension Ringer Horn and Strobe Combination (TELC)

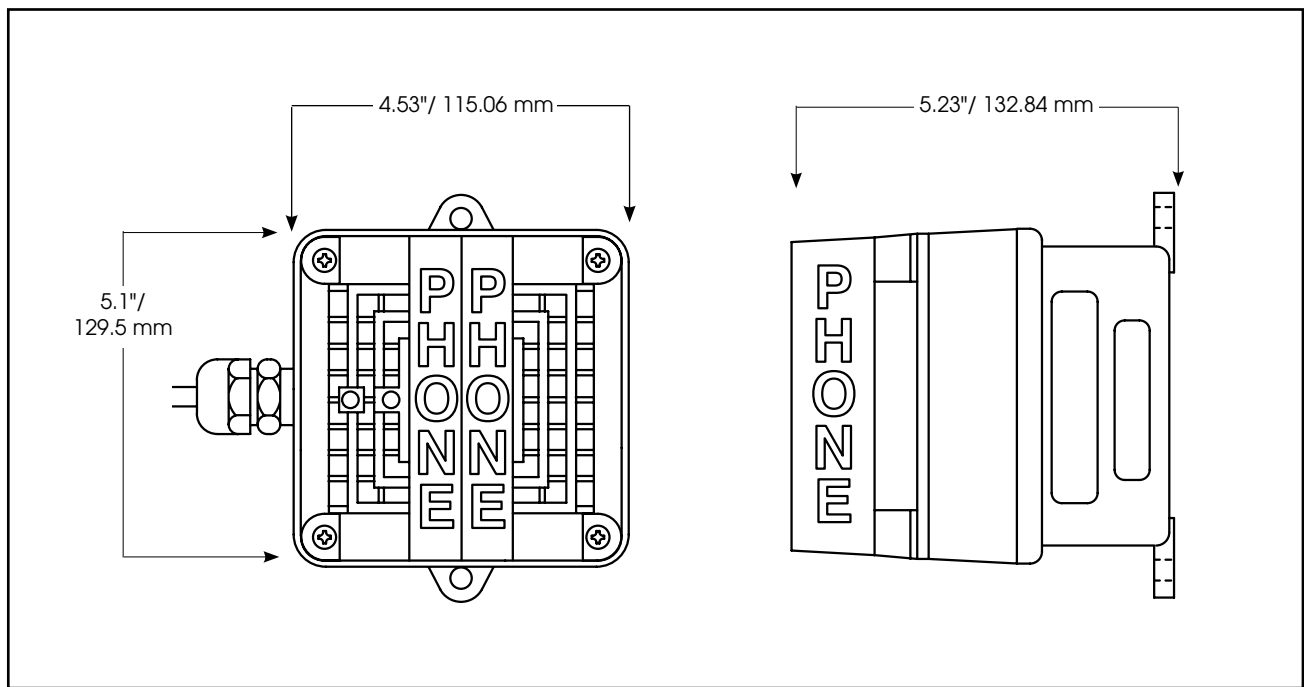

### S P E C I F I C A T I O N S

Operating Temperature:	32°F to 112°F	0°C to 44°C
Ringing Signal:		90VAC, 20Hz
Ring Detection:		15.8-60Hz, 40-150VAC
Humidity Range (Storage and Operating):		0 to 85% R.H, noncondensing
Net Weight:	3.0 lbs	1.36 kg
Shipping Weight:	3.4 lbs	1.54 kg
Height:	5.10"	129.54 mm
Width:	4.53"	115.06 mm
Depth:	5.23"	132.84 mm

### H O W T O O R D E R

#### Specify Model:

**TELC-120** – TelCom® combination strobe and horn, 120VAC