



**LIGHTING
PRODUCTS**

FEDERAL SIGNAL CORPORATION
2645 Federal Signal Dr., University Park, IL 60484-3167
TEL 800.433.9132 FAX 800.343.9706
www.fedsig.com

**RAISED POLE WARNING
SWITCH AND INDICATOR**

OVERVIEW

The raised pole warning switch is a normally closed magnetic switch mounted on the outer pole. A magnet, mounted on the inside of the inner pole, keeps the switch contact open when the pole is in the down position (see Diagram 1).

When the light is raised the magnet moves with the inner pole away from the switch and the contact closes (see Diagram 2).

This completes the electrical circuit to turn on the raised pole warning indicator (see Wiring).

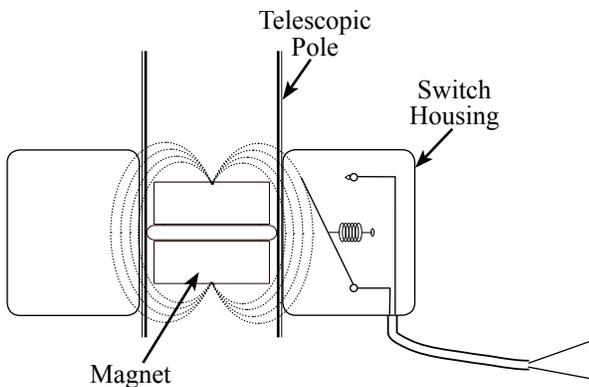


Diagram 1. Pole Down; Magnet Holds Switch Open


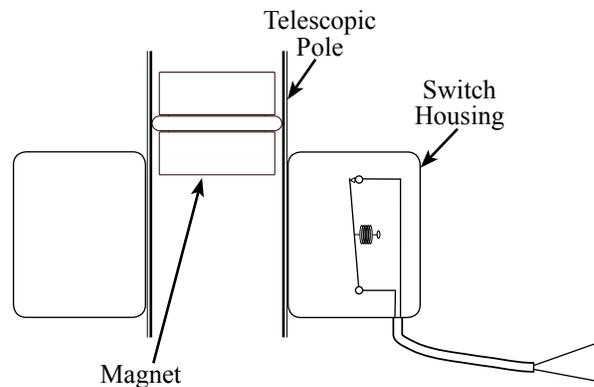


Diagram 2. Pole Moves Up with Magnet; Switch Closes

Wiring


The switch is shown with pole in the up position.

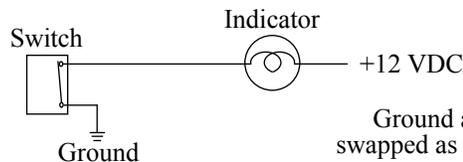

Ground and +12 VDC can be swapped as required for installation.


Three Types of Switch Housings

Side Mount Pull-Up Poles and Thru-The-Roof Push-Up Poles

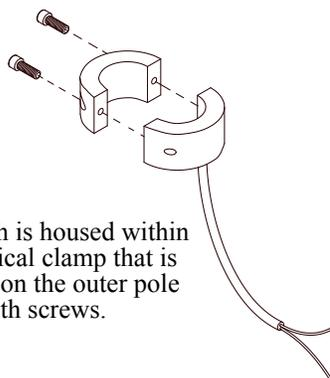


The switch is housed within a cylindrical clamp that is mounted on the outer pole with screws.

Top Mount Pull-Up Poles



The switch is housed within the mounting flange.

Side Mount Push-Up Poles

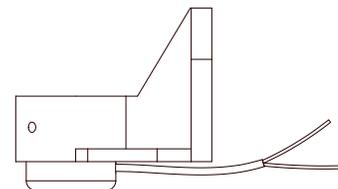

The switch is housed within a PVC holder that is mounted in the bottom steady rest bracket.

DESCRIPTION

Specifications


Switch		Indicator	
Contact	Single Pole Single Throw (SPST)	Type	1891
Position	Normally Closed (NC)	Voltage	+ 14 VDC
Current	0.25 AMPS	Current	0.25 AMPS
Power	3 WATTS		

CAUTION: If the switch is to be used with a higher current application a relay must be provided to avoid switch failure.


Switch Housing Locations

If the switch housing is removed during installation, care should be taken to remount the switch in the correct position. Raise and lower the pole and ensure that the switch opens and closes correctly.


Top Mount
Pull-Up Poles




Thru-The-Roof
Push-Up Poles




Side Mount
Push-Up Poles



Side Mount
Pull-Up Poles

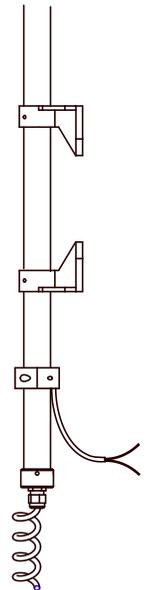

PARTS LIST

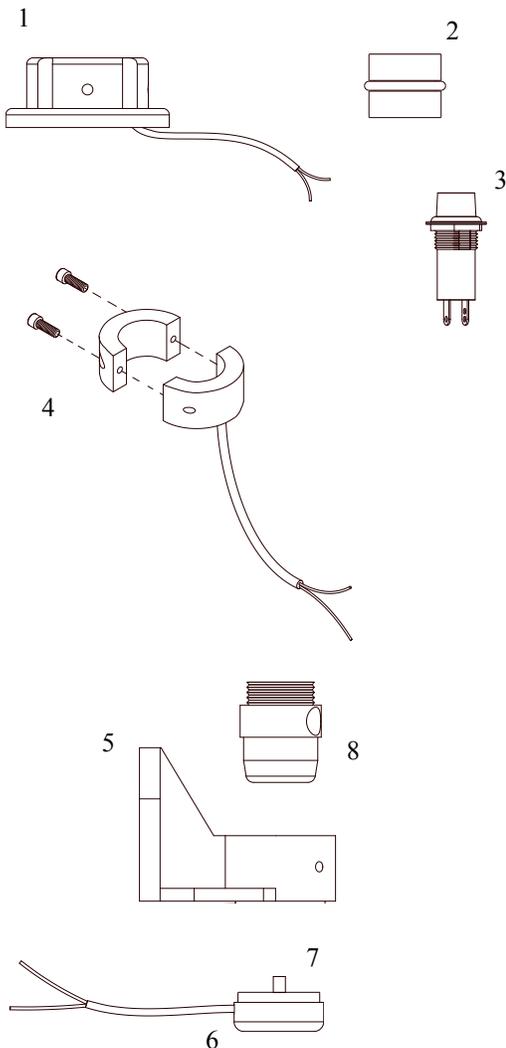

Index	Description
-	Kit, Raised Pole Warning, Top Mount Pull-Up Poles
1	. Switch Assembly, Top Flange, Magnetic, NC
2	. Magnet, Inner Pole
3	. Indicator Assembly
-	Kit, Raised Pole Warning, Thru-the-Roof Push-Up and Side Mount Pull-Up Poles
4	. Switch Assembly, Donut, Magnetic, NC
2	. Magnet, Inner Pole
3	. Indicator Assembly
-	Kit, Raised Pole Warning, Side Mount Push-Up Poles
5	. Switch Assembly, Steady Rest,
6	. . Switch Holder, PVC
7	. . Switch, Magnetic, NC
8	. Magnet, Pole End w/Strain Relief
3	. Indicator Assembly