


C

► Models 154XSTHI and 154XST-024C-CN

Hazardous Location Supervised Strobe Warning Light

These models are hazardous location strobe light that provide 60 high-intensity flashes per minute. This warning light is available in 24VDC with a 4-wire supervisable power circuit for fire alarm and suppression supervised control panels.

These warning lights offer an aluminum base, coated for corrosion-resistance that is ready for mounting on a 3/4-inch pipe. The dome guard (included) fits over the glass dome to protect it against accidental collision with moving equipment, such as forklifts.

This rugged strobe warning light is specifically designed for hazardous locations or corrosive environments where a very bright visual signal is required. This warning light can be used for plant evacuation or other communication needs.

FEATURES

- Available in 24VDC
- Four wires and supervisory diode
- Clear dome
- 3/4-inch pipe mount
- Dome guard included
- Type 4X, IP66, IP69K enclosure
- UL Listed for Class I, Division 2, Groups A, B, C and D; Class II, Division 1, Groups E, F and G; and Class III
- Marine Rated
- 154XSTHI is UL Fire Listed
154XST-024C-CN is ULC Fire Listed


MODEL	VOLTAGE	CURRENT DRAW	FLASH RATE/ MINUTE	CANDELA EFFECTIVE
154XSTHI 154XST-024C-CN	24VDC (regulated 16V-33V)	(0.483A-0.226A)	60	17 cd with guard 25 cd without guard

HAZARDOUS LOCATION RATING: 154XSTHI and 154XST-024C-CN

T-CODE AT MAXIMUM AMBIENT TEMPERATURE, °C

HAZARDOUS LOCATION	40°C
Class I, Division 2, Groups A, B, C, D	T4
Class II, Division 1, Groups E, F, G	T5
Class III	T5

Hazardous Location Strobe Light (154XSTHI and 154XST-024C-CN)

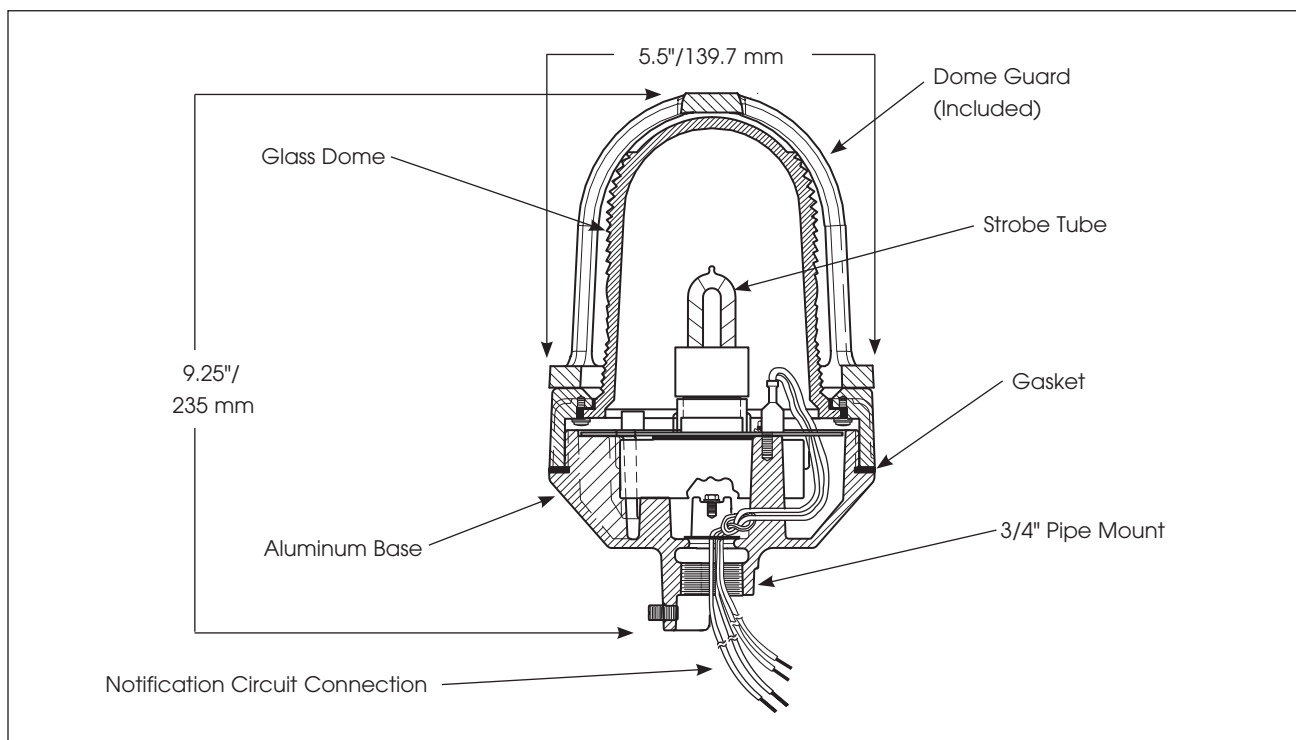

SPECIFICATIONS

Lamp Life ¹ :	10,000 Hours	
Lamp Source	Strobe	
Operating Ambient Temperature:	-67°F to 150°F	-55°C to 66°C
Net Weight:	3.8 lbs	1.7 kg
Shipping Weight:	4.5 lbs	2.0 kg
Height:	9.25"	235 mm
Diameter:	5.5"	139.7 mm

¹ Optimal hours under ideal conditions.

REPLACEMENT PARTS *

Description	Part Number
PC Assembly, 24VDC	K2001173A
Strobe Tube	K149122B
Dome Guard, Red	K8449090B-01
Dome Guard, Black	K8449090B

* ULC prohibits any field servicing of hazardous location products. Part numbers are for reference only.

HOW TO ORDER

Specify Model:

154XSTHI – UL Fire Listed Strobe, 24VDC, hazardous location, 4-wire, clear

154XST-024C-CN – ULC Fire Listed Strobe, 24VDC, hazardous location, 4-wire, clear