

► Model VALS

Visalert® Strobe Lights



Federal Signal's Visalert® is a three-dimensional, triangular warning light designed to be mated with Federal Signal's Model 350 Vibratone® horn and Model 50GC SelecTone® amplified speaker. The Visalert can also be used as a stand-alone device. Knockouts on the 50GC and 350 audible devices (sold separately) ensure easy installation. The units can be either independently or simultaneously wired with the audible device. The Visalert uses a linear strobe tube, and all the circuitry is contained within the lens.

Visalert units are recommended for use in industrial applications and situations where effective visual warning is needed.

Federal Signal's Visalert strobe light is a low-maintenance strobe light in a compact size that is perfect for control panel applications.



FEATURES


- Available in 24 Vdc, 120 Vac, and 240 Vac
- Five lens colors: Amber, Blue, Clear, Green, and Red
- 4,000-hour strobe tube
- Easy surface mount installation onto Federal Signal's 350 Vibratone horn and Model 50GC SelecTone amplified speaker (sold separately)
- Indoor/outdoor use
- Conformal coated PCB
- Type 3R enclosure
- CSA Certified
- UL Listed

MODEL	VOLTAGE	OPERATING CURRENT	FLASH RATE/ MINUTE	LIGHT OUTPUT PEAK ¹	MOUNT
VALS-024*	24 Vdc	0.08 A	80	108,000 cd	Surface
VALS-120*	120 Vac 50/60 Hz	0.06 A	80	108,000 cd	Surface
VALS-240*	240 Vac 50/60 Hz	0.03 A	80	108,000 cd	Surface

* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, or (R) Red

¹ Peak candela is the maximum light intensity generated by a flashing light during its light pulse

Visalert® Strobe Lights (VALS)

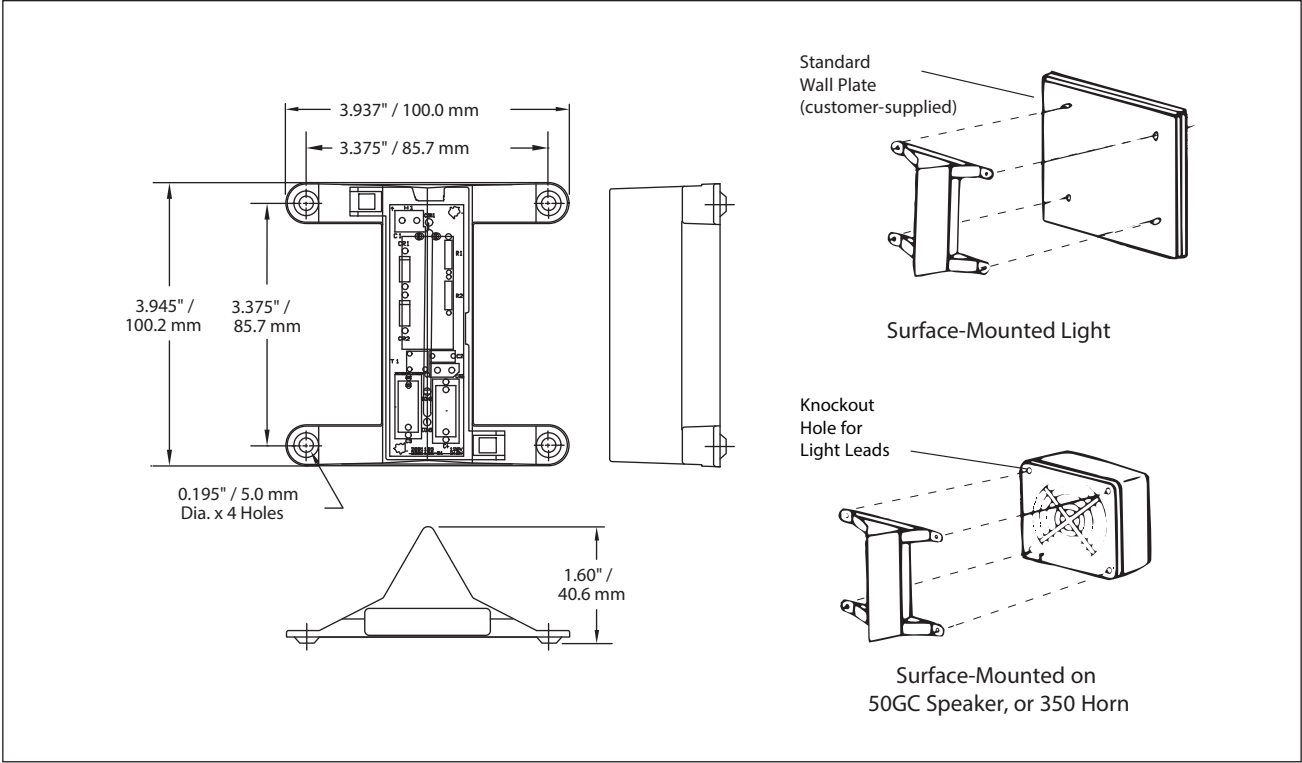

SPECIFICATIONS

Lamp Life:	4,000 Hours
Light Source:	Strobe tube
Operating Temperature:	-31° to 150°F (-35° to 66°C)
Net Weight:	0.10 lb (0.045 kg)
Shipping Weight:	0.25 lb (0.113 kg)
Height:	3.945 in (100.2 mm)
Width:	3.937 in (100.0 mm)
Depth:	1.60 in (40.6 mm)

ACCESSORIES

Description	Part Number
SelecTone® Amplified Speaker	50GC
Vibratone® Horn	350

HOW TO ORDER

VALS	-	120	A
TYPE VALS		VOLTAGE 024 (24 Vdc) 120 (120 Vac) 240 (240 Vac)	COLOR A Amber B Blue C Clear G Green R Red

REPLACEMENT PARTS

Description	Part Number
Strobe Tube	K149128A