



(Shown with pendant mount)

► Model FSEX-HI

Explosion-Proof Hearing Impaired Strobe Light

Model FSEX-HI explosion-proof strobe light produces 60 high-intensity flashes per minute. This warning light operates on 24VDC and is unique to the market because it covers an entire range of possible mounting configurations – including dome up. This light is designed for use in alarm notification systems and is compatible with fire alarm and suppression supervised control panels and power boosters.

Model FSEX-HI features a voltage in-rush limiting PCB design that provides greater compatibility with factory automation control systems and less electrical interference with in-rush sensitive devices.

Model FSEX-HI is specifically designed for explosion-proof atmospheres and/or corrosive environments. Since it is easy to install and requires very low maintenance, it is ideal for use in areas such as oil rigs, mines, refineries, and chemical plants.

FEATURES

- Approved for mounting in any manner—including dome up
- Synchronize with SSM module
- Current limited
- 10,000 hour strobe tube
- 3/4" NPT pendant, ceiling and wall mount options available
- Dome guard optional
- Conformal coated PCB
- Type 4X, IP66 enclosure
- IP69K compliant
- Marine Rated
- CSFM Approved
- UL Listed for Class I, Division 1, Group C and D; Class I, Division 2, Groups A, B, C, and D; Class II, Division 1, Groups E, F, and G; Class III
- UL Fire Listed

MODEL	VOLTAGE	OPERATING CURRENT	FLASH RATE / MINUTE	CANDELA PEAK ²	UL 1971	ECP
FSEX-HI-MOD¹	24VDC	1.90 A (3.0 A in-rush)	60	2,000,000	150	850

¹ See "how to order" for mounting options


² Peak candela is the maximum light intensity generated by a flashing light during its light pulse

HAZARDOUS LOCATION RATING: FSEX-HI

T-CODE AT MAXIMUM AMBIENT TEMPERATURE, °C

Hazardous Location	40°C	65°C
Class I, Division 1, Groups C, D	T6	T4A
Class I, Division 2, Groups A, B, C, D	T2B	T2A
Class II, Division 1, Groups E, F, G	T6	T4A
Class III	T6	T4A

Explosion-Proof Hearing Impaired Strobe Light (FSEX-HI)

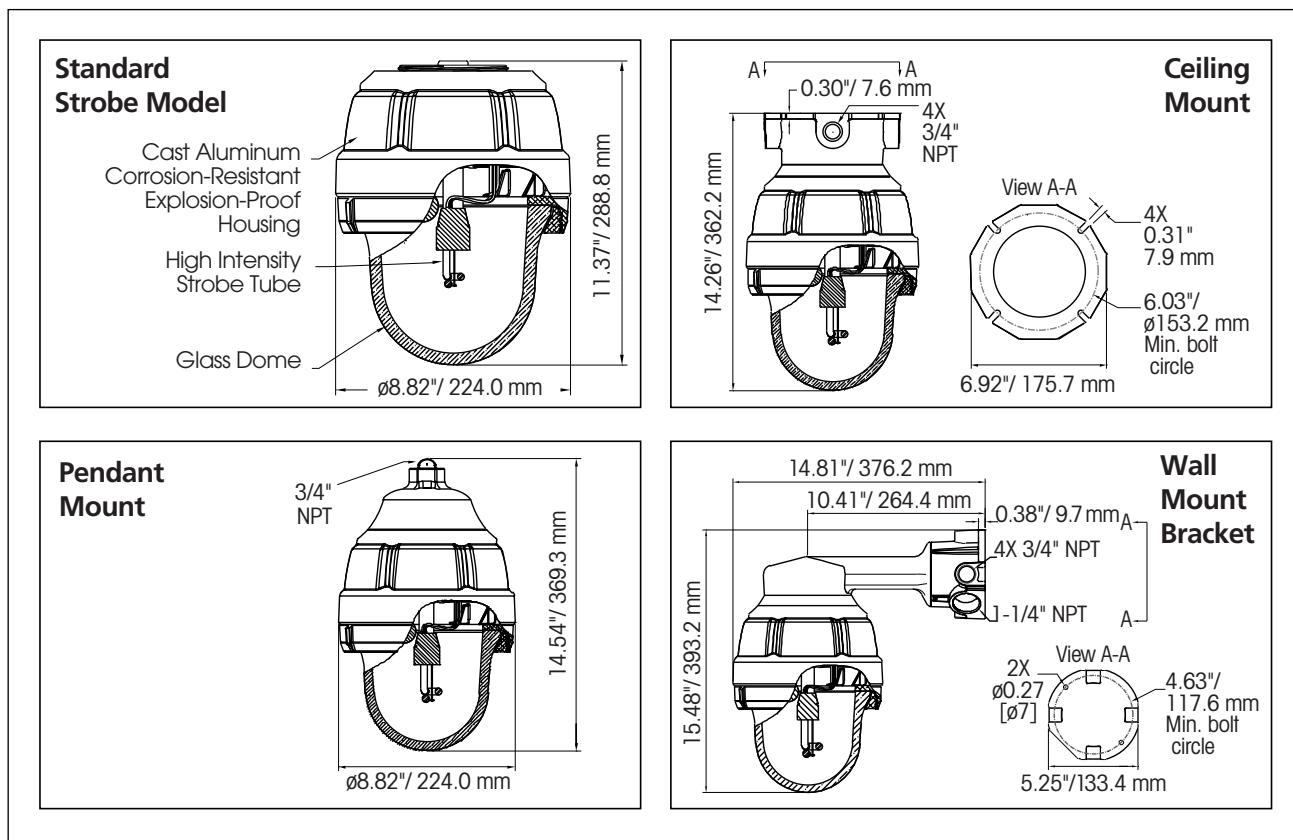

SPECIFICATIONS

Lamp Life:	10,000 Hours	
Light Source:	Strobe tube	
Operating Temperature Range:	-67°F to 150°F	-55°C to 66°C
Net Product Weight		
Signal without Mounting:	13.9 lbs	6.3 kg
Ceiling Mount:	4.5 lbs	2.0 kg
Pendant Mount:	2.0 lbs	0.9 kg
Wall Mount:	5.9 lbs	2.7 kg

REPLACEMENT PARTS

Description	Part Number
Exterior Dome Assembly, Red	K8436147A-01
24VDC Mechanism	K8436107F-03
Strobe Tube	K8107159A
PC Assembly, 24VDC	K2001918B-01

HOW TO ORDER

Specify Model:
FSEX-HI-MOD – Hearing Impaired Explosion-Proof Strobe Light

Specify Mounting:*

Description	Part Number
Ceiling Mount	CMXC-R-SB
Pendant Mount	PMXC-R-SB
Wall Mount	WMXC-4R-SB

* Mounting kit must be ordered with unit, sold separately

OPTIONAL ACCESSORIES

Description	Part Number
Dome Guard	DGXC-SB
Strobe Synchronization Module	SSM