



**FEDERAL SIGNAL**  
Safety and Security Systems

# Spire® 100 LED Beacon



---

## ***Installation and Maintenance Instructions***

25500544

Rev. A3 0323

Printed in U.S.A.

© Copyright 2019-2023 Federal Signal Corporation

Las instrucciones en español comienzan en la página 21

Pour voir ce manuel en français, allez à [www.fedsig.com](http://www.fedsig.com)

---

## Limited Warranty

This product is subject to and covered by a limited warranty, a copy of which can be found at [www.fedsig.com/SSG-Warranty](http://www.fedsig.com/SSG-Warranty). A copy of this limited warranty can also be obtained by written request to Federal Signal Corporation, 2645 Federal Signal Drive, University Park, IL 60484, email to [info@fedsig.com](mailto:info@fedsig.com) or call +1 708-534-3400.

This limited warranty is in lieu of all other warranties, express or implied, contractual or statutory, including, but not limited to the warranty of merchantability, warranty of fitness for a particular purpose and any warranty against failure of its essential purpose.



## FEDERAL SIGNAL

### Safety and Security Systems

2645 Federal Signal Drive  
University Park, Illinois 60484

[www.fedsig.com](http://www.fedsig.com)

Customer Support

Police/Fire-EMS: 800-264-3578 • +1 708 534-3400

Work Truck: 800-824-0254 • +1 708 534-3400

Technical Support 800-433-9132 • +1 708 534-3400

---

## Contents

Safety Message to Installers and Service Personnel.....	4
Overview of the Spire® 100 LED Beacon.....	7
Unpacking the Beacon.....	8
Attaching the Optional Mounting Flange to the Beacon .....	8
Wiring the Beacon .....	10
Permanently Mounting the Beacon .....	12
Mounting the Rubber Base on the Beacon .....	14
Pipe Mounting the Beacon .....	16
Using Magnetic or Magnetic/Suction Mounting .....	16
Configuring the Beacon.....	17
Selecting a Flash Pattern.....	17
Cleaning the Beacon .....	19
Ordering Replacement Parts or Technical Support Service .....	19
Returning a Product to Federal Signal.....	19

### Figures

Figure 1 Optional Mounting Flange .....	9
Figure 2 Flange Base .....	10
Figure 3 Wiring .....	11
Figure 4 Drilling (Not to scale) .....	13
Figure 5 Permanent-mount beacon (exploded view) .....	14
Figure 6 Rubber Base mount beacon (exploded view).....	15

### Tables

Table 1 Product specifications.....	7
Table 2 Mounting kit hardware for permanent mounted beacons .....	8
Table 3 Mounting hardware for Rubber base mounted beacons.....	8
Table 4 Wire Connections.....	11
Table 5 Flash Patterns.....	18

### **Safety Message to Installers and Service Personnel**

#### **⚠ WARNING**

People's lives depend on your proper installation and servicing of Federal Signal products. It is important to read and follow all instructions shipped with this product. In addition, listed below are some other important safety instructions and precautions you should follow:

- To properly install or service this equipment, you must have a good understanding of automotive mechanical and electrical procedures and systems, along with proficiency in the installation and service of safety warning equipment. Always refer to the vehicle's service manuals when performing equipment installations on a vehicle.
- To be an effective warning device, this product produces bright light that can be hazardous to your eyesight when viewed at a close range. Do not stare directly into this lighting product at a close range, or permanent damage to your eyesight may occur.
- Do not install the light system in an area that would block, impair, or blind the driver's vision. Ensure that the light system is mounted in a position that is outside the driver's field of vision so the driver can safely operate the vehicle.
- A light system is a high current system. For the system to function properly, a separate negative (–) connection and positive (+) connection must be made. All negative connections should be connected to the negative battery terminal, and a suitable fuse should be installed on the positive battery terminal connection as close to the battery as possible. Ensure that all wires and fuses are rated correctly to handle the device and system amperage requirements.
- Never attempt to install aftermarket equipment that connects to the vehicle wiring without reviewing a vehicle wiring diagram available from the vehicle manufacturer. Ensure that your installation will not affect vehicle operation or mandated

## ***Safety Message to Installers and Service Personnel***

---

safety functions or circuits. Always check the vehicle for proper operation after installation.

- The lighting system components, especially the outer housing, get hot during operation. Be sure to disconnect power to the system and allow the system to cool down before handling any components of the system.
- Do not mount a radio antenna within 18 inches (45.7 cm) of the lighting system. Placing the antenna too close to the lighting system could cause the lighting system to malfunction or be damaged by strong radio fields. Mounting the antenna too close to the lighting system may also cause the radio noise emitted from the lighting system to interfere with the reception of the radio transmitter and reduce radio reception.
- Do not attempt to wash any unsealed electrical device while it is connected to its power source.
- DO NOT connect this system to the vehicle battery until ALL other electrical connections are made, mounting of all components is complete, and you have verified that no shorts exist. If the wiring is shorted to the vehicle body or frame, high current conductors can cause hazardous sparks, resulting in electrical fires or flying molten metal.
- DO NOT install equipment or route wiring (or the plug-in cord) in the deployment path of an airbag.
- Before drilling into a vehicle structure, ensure that both sides of the surface are clear of anything that could be damaged. Remove all burrs from drilled holes. To prevent electrical shorts, grommet all drilled holes through which wiring passes. Also, ensure that the mounting screws do not cause electrical or mechanical damage to the vehicle.
- Because vehicle roof construction and driving conditions vary, do not drive a vehicle with a magnetically mounted warning light installed. The light could fly off the vehicle, causing injury or damage. Repair of damage incurred

## ***Safety Message to Installers and Service Personnel***

---

because of ignoring this warning shall be the sole responsibility of the user.

- Locate the light system controls so the VEHICLE and CONTROLS can be operated safely under all driving conditions.
- After installation, test the light system to ensure that it is operating properly.
- Test all vehicle functions, including horn operation, vehicle safety functions, and vehicle light systems to ensure proper operation. Ensure that the installation has not affected the vehicle operation or changed any vehicle safety function or circuit.
- Scratched or dull reflectors or lenses will reduce the effectiveness of the lighting system. Avoid heavy pressure and the use of caustic or petroleum-based products when cleaning the lighting system.
- Replace any optical components that may have been scratched or crazed during system installation.
- Do not attempt to activate or deactivate the light system controls while driving in a hazardous situation.
- Frequently inspect the light system to ensure that it is operating properly and that it is securely attached to the vehicle.
- After installation and testing are complete, provide a copy of these instructions to instructional staff and all operating personnel.
- File these instructions in a safe place and refer to them when maintaining and/or reinstalling the product. Failure to follow all safety precautions and instructions may result in property damage, serious injury, or death.

### Overview of the Spire® 100 LED Beacon

The beacon uses an LED light source to provide a reliable signal with 25 selectable flash patterns. Use pattern 10 if you will be utilizing an external flasher. The beacon may be flush mounted, rubber base mounted, pipe mounted, or attached to brackets. Optional plastic or aluminum mounting flanges are available. The light can also be ordered with magnetic mounts or magnetic suction mounts. The light can operate on a nominal 12 or 24 Vdc power source. A waterproof connector socket is molded into the base. Pre-terminated wires and connector parts are supplied to build the power leads. Installer-supplied wire may be used to neatly extend the power connection to the vehicle's harness without butt splices. Optional branch guards and dust covers are also available.

**Table 1 Product specifications**

Input Voltage	12-24 Vdc
Input Current	0.6 A at 12 Vdc 0.3 A at 24 Vdc
Flash rate	See Table 5 on page 18 for a description of the patterns.
Height	Tall beacon: 7.10 inches (18.03 cm) with flange 6.15 inches (15.62 cm) tall without flange Tall beacon with rubber base: 8.28 inches (21.03 cm) Short beacon: 5.60 inches (14.22 cm) with flange 4.65 inches (14.35 cm) without flange Short beacon with rubber base: 6.78 inches (17.22cm)
Diameter	6.54 in with flange 5.22 in without flange 5.98 in with rubber base
Weight	0.75-2.0 lb (0.34-0.91 kg)
Approvals	Marked on product

## Attaching the Optional Mounting Flange to the Beacon

---

### Unpacking the Beacon

After unpacking the beacon, inspect it for damage that may have occurred in transit. If there is damage, file a claim immediately with the carrier, stating the extent of the damage. Carefully check all envelopes, shipping labels, and tags before removing or destroying them. If installing a permanent mounted beacon, ensure that the parts listed in Table 2 are included in the package.

**Table 2 Mounting kit hardware for permanent mounted beacons**

Qty.	Description
Basic parts included with permanent mount beacons	
3	#8 Panhead Phillips Screw
3	#10 Panhead Phillips Screw
1	Terminated Power Wire, 18 AWG, red
1	Terminated Power Wire, 18 AWG, black
2	Terminal Contacts
1	Waterproof Connector Shell
1	Locking Wedge
Additional parts included with mounting flanges	
3	#10 Machine Screws, 1-3/4" long
3	#10 Machine Screws, 7/8" long
3	#10 Machine Nuts

If installing Rubber base mounted beacon, ensure that the parts listed in Table 3 are included in the package.

**Table 3 Mounting hardware for Rubber base mounted beacons**

Cant.	Descripción
2	8-32 Stainless Steel Keps® Nut

### Attaching the Optional Mounting Flange to the Beacon

If the optional mounting flanges are to be used, you can either attach them to the beacon before installation or attach the flange to the vehicle first. If desired, permanently lock the flange to the base using the three #8 screws provided. See Figure 2.



## Attaching the Optional Mounting Flange to the Beacon


### **⚠ WARNING**

**DO NOT DRIVE WITHOUT FIRST MOUNTING THE BEACON TO THE FLANGE:** Because vehicle roof construction and driving conditions vary, do not drive a vehicle if the beacon is not attached to the flange. The beacon could fly off the vehicle, causing injury or damage. Repair of damage incurred because of ignoring this warning shall be the sole responsibility of the user.

To attach the mounting flange:

1. Locate the detent on the beacon and one of the two detent notches on the flange.
2. Align the beacon as shown in Figure 1.

**Figure 1 Optional Mounting Flange**

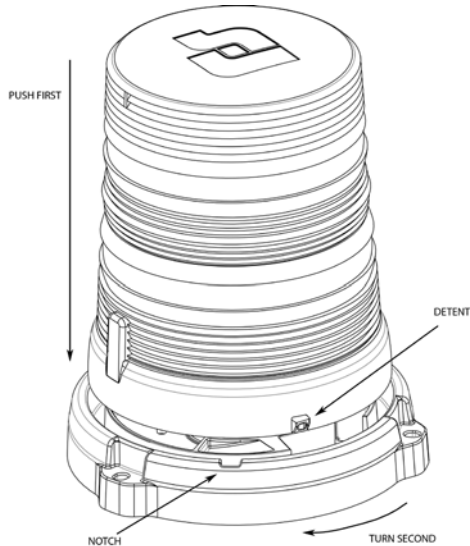

3. Push the beacon down completely and turn clockwise 1/8 turn until the detent locks in place.

To remove the beacon from the flange:


1. Use a flat-tipped screwdriver to push the detent while turning the beacon counterclockwise.
2. Pull up when the detent is free of the notch.

## Wiring the Beacon

---

If desired, permanently lock the flange to the base using the three #8 screws provided. See Figure 2.

**Figure 2 Flange Base**

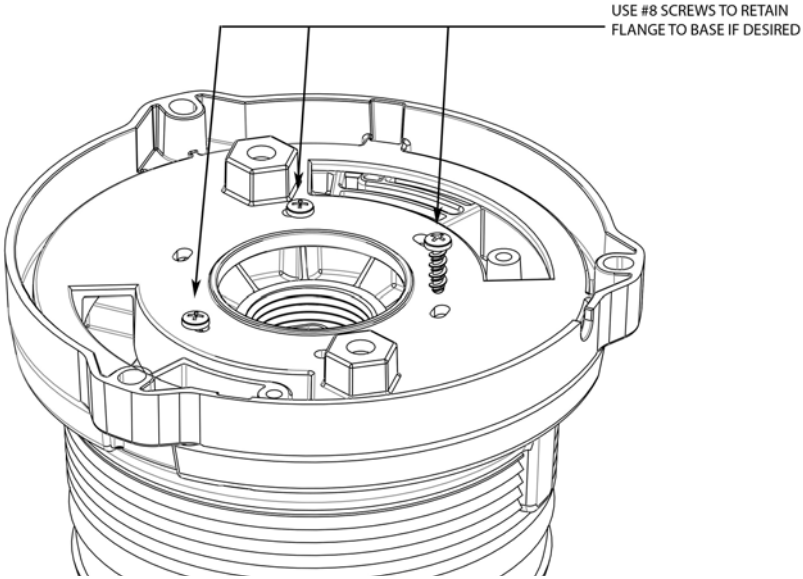

## Wiring the Beacon

**NOTICE**

**REVERSE POLARITY/MISWIRING:** To avoid damage to the light, ensure that the input voltage is the same as the voltage rating of the light. Ensure that correct polarity is observed. Also ensure that the unit is properly fused with a 1.0-amp fuse.


**Table 4 Wire Connections**

Color	Description	Connection Point
Black	Ground	Battery Negative
Red	Mode 1	Switched Positive 12-24 Vdc

To wire the beacon:

1. Determine the required length of wires needed. The beacon is supplied with 12-inch pre-terminated wires, which may be butt spliced to longer wires if needed. There are also two loose terminals supplied, which may be crimped to installer-supplied wires of longer length. For lengths up to 15 feet (5 m), use a minimum of 18 AWG (1 mm<sup>2</sup>) wire. For lengths over 15 feet, use a minimum of 16 AWG (1.5 mm<sup>2</sup>) wire.
2. If using installer-supplied wire for the entire length, terminate the wires with the supplied metal terminals.
3. Assemble either the supplied 12-inch wires or the installer-supplied wires into the connector shell. Refer to Figure 3. Insert the red wire into the location on the connector shell marked with a “1.” The terminal will click into place. Repeat for the black wire into the location marked “2.”

**Figure 3 Wiring**

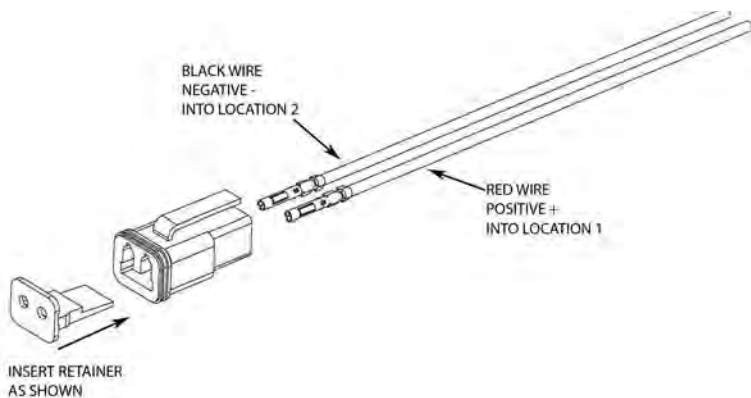

4. Plug the retainer lock into the connector shell as shown to lock the wires into the shell.

## ***Permanently Mounting the Beacon***

---

5. If the supplied 12-inch wires were used, use insulated butt connectors to connect the wires to the beacon's power cable. Ensure that the connectors are securely crimped and properly insulated.
6. Install a one-amp fuse and fuse holder to the positive (+) terminal at the voltage source. Connect one side of the power switch to this fuse. Connect the beacon's red wire to the switched terminal of the switch.
7. Connect the black (-) wire from the beacon to a known good vehicle ground as close to the beacon as is practical.

## **Permanently Mounting the Beacon**

Selecting a flash pattern is optional and should be completed during the installation. For flash pattern descriptions, see the table on page 18.

To mount the beacon:


1. Scribe the locations of the three mounting holes in the base.

There are two sets of evenly spaced holes, 120° apart on the bottom of the beacon itself. Holes for the #8 self-tapping screws are on a 2.75-inch diameter (where the lines intersect the inner circle in Figure 3). The holes for the #10 self-tapping screws are on a 4-inch diameter (where the lines intersect the middle circle in Figure 3). The 4-inch pattern is the preferred pattern for permanent mounting.

If one of the optional mounting flanges is to be used, three #10 screws are on a 6.00-inch circle (where the lines intersect the outer circle in Figure 3).

Drill three 0.177-inch diameter holes for the #8 screws, or three 0.201-inch diameter holes for the #10 screws.

**Figure 4 Drilling (Not to scale)**

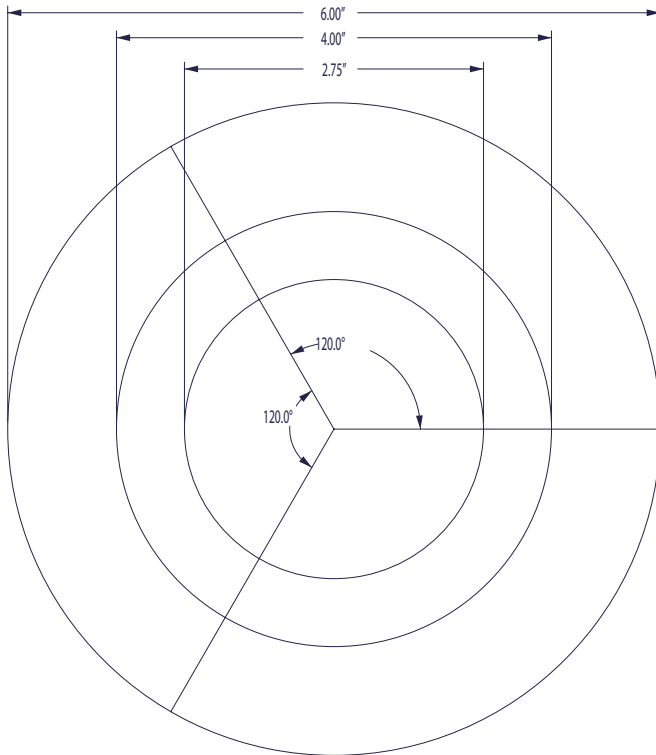

2. Scribe a hole for the wires or an installer-supplied bushing at the center of the screw pattern.

**NOTICE**


***DRILLING PRECAUTIONS: Before drilling holes, check the area into which you plan to drill to ensure that you do not damage vehicle components while drilling. All drilled holes should be deburred, and all sharp edges should be smoothed. All wires going through drilled holes should be protected by a grommet or convolute/split-loom tubing.***

3. Drill a suitably sized hole at the scribed position for the bushing and wire routing hole. Otherwise, route the wires through the drain notch in the optional mounting flange. Leave open space for water to drain.

## Mounting the Rubber Base on the Beacon

---

Figure 5 Permanent-mount beacon (exploded view)

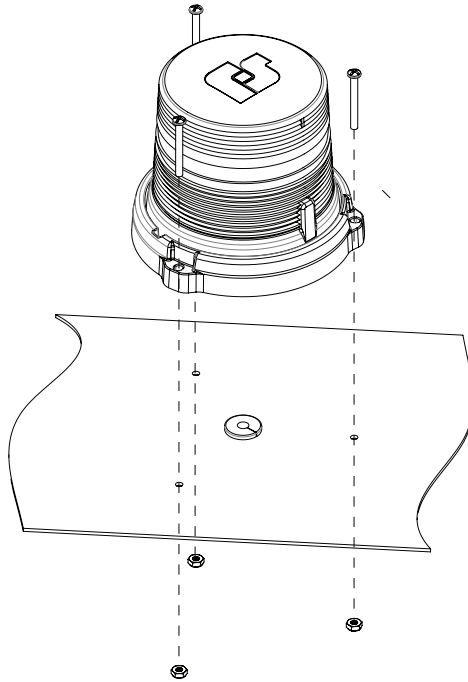

4. Align the beacon over the drilled holes. Route the wires through the wire routing hole. Seal the hole with a bushing or RTV if entering a watertight compartment.
5. Secure the base to the mounting surface with the selected panhead screws.


## Mounting the Rubber Base on the Beacon

To install the light on the mounting surface:

1. Determine the strobe light mounting location.
2. Before proceeding, plan all wiring and cable routing.
3. Scribe a wire routing hole location on the mounting surface at the center of the strobe light location. Scribe mounting hole locations on the mounting surface 2.06 inches from the center on either side of the wire routing hole.

## Mounting the Rubber Base on the Beacon

Figure 6 Rubber Base mount beacon (exploded view)

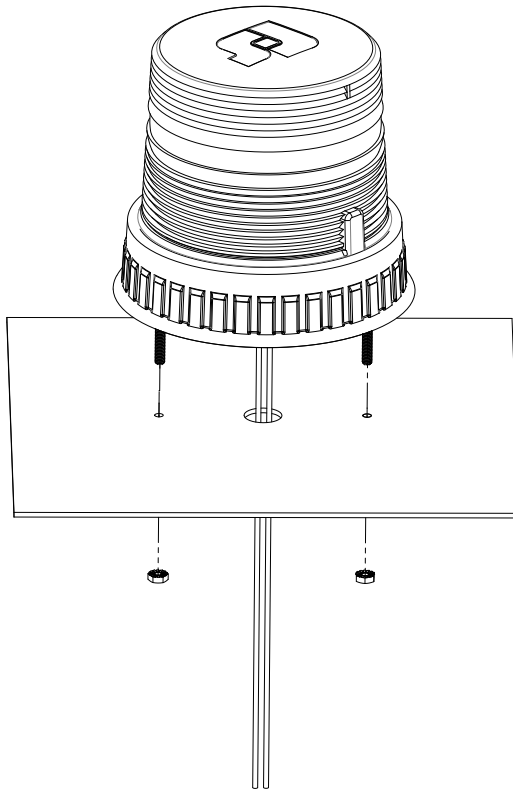

### NOTICE

**DRILLING PRECAUTIONS:** Before drilling holes, check the area into which you plan to drill to ensure that you do not damage vehicle components while drilling. All drilled holes should be deburred, and all sharp edges should be smoothed. All wires going through drilled holes should be protected by a grommet or convolute/split-loom tubing. When drilling holes, ensure that holes are drilled only through sheet metal and not through upholstery.

4. Drill two 0.171-inch holes at the scribed mounting hole locations. Drill a suitably sized hole at the scribed position for the bushing and wire routing hole. Remove all burrs and sharp edges.

## Using Magnetic or Magnetic/Suction Mounting

---

5. Install the recommended grommet in the wire routing hole.
6. Route the red and black wires through the recommended grommet in the mounting surface. Apply a silicone sealing compound around all holes in the mounting surface.

### Pipe Mounting the Beacon

The base was designed for the optional installation onto the end of a threaded 1-inch NPT pipe. The supply wires are to run within the pipe for protection.

1. Route the wires through the pipe, and connect the wires to the beacon as described in “Wiring the Standard Beacon.”
2. Screw the beacon onto the pipe. Ensure that the wires are not pinched inside the pipe or twisted severely. Do not overtighten; the base may split.

## Using Magnetic or Magnetic/Suction Mounting

### **WARNING**

***DO NOT DRIVE WITH MAGNETICALLY-MOUNTED BEACON INSTALLED: Because vehicle roof construction and driving conditions vary, do not drive a vehicle with a magnetically-mounted beacon installed. The beacon could fly off the vehicle, causing injury or damage. Repair of damage incurred because of ignoring this warning shall be the sole responsibility of the user.***

The holding power of magnetic mounting systems depends on surface finish, surface flatness, and thickness of the steel mounting surface. Therefore, to promote proper magnetic mounting:

- Keep the mounting surface and magnets clean, dry, and free of foreign particles that prevent good surface contact.
- Ensure that the mounting surface is flat.
- Do not use a magnetic mounting system on vehicles with vinyl tops.
- To prevent the sliding of the beacon on the mounting surface, avoid quick acceleration and hard stops.



## Selecting a Flash Pattern

---

To temporarily mount the beacon to a vehicle with magnetic mounting or magnetic suction mounting:

1. Place the beacon on the vehicle roof at a location that provides maximum signaling effectiveness for your application.
2. For models with suction cups, apply downward pressure to the top of the dome while pulling up on the release tabs to release trapped air.
3. To operate the magnet-mounted beacon, insert the plug at the end of the cable assembly into the 12-volt power outlet socket. Turn the beacon on and off using the power switch on the plug. To show that the power is on, a pilot light turns on.
4. To remove models with a suction cup, pull up on the release tabs while picking up the beacon.

### Configuring the Beacon

If the beacon's operating functions are to be changed from the default, perform the following steps.

### Selecting a Flash Pattern

#### **WARNING**

**LIGHT HAZARD: This product contains a high-intensity LED device. To prevent permanent eye damage, DO NOT stare into the light beam at close range.**

Selecting a flash pattern from the beacon's internal library of flash patterns is optional. It should be done during installation. For the flash patterns, see Table 5 on page 18.

To select a flash pattern:

1. Turn the power from off to on three times, once per second, to enter Programming Mode.
2. To display the next pattern in the sequence, cycle the power switch off and on. Continue to operate the switch until you see the pattern you want.

## Selecting a Flash Pattern

---

- To exit Programming Mode and set the pattern in memory, either turn the beacon off for more than five seconds or allow it to run for 60 seconds or more.

**Table 5 Flash Patterns**

No.	Description	Flash Rate (FPM)
1*	Double Quad	60
2	Chopped Double	60
3	Double Pulse	80
4	Pulsing Quad	60
5	Triple FedPulse	60
6	Reverse Double Pulse	81
7	Breathing	60
8	Random Full, All Patterns Various	
9	Random, Select Patterns #11-25 Various	
10	Steady	Illuminates at full power for three seconds and then reduces
11	Single Flash Slow	75
12	Single Flash	120
13	Double Flash	80
14	Double Flash Fast	120
15	Triple Flash	80
16	Triple Flash Fast	120
17	Quad Flash Slow	60
18	Quad Flash	75
19	Quad Flash Fast	95
20	Quad FedPulse	75
21	5x Flash	75
22	7x Flash	80
23	Single Flash / Quad	120/60
24	Decelerating	60
25	Accelerating	60

*\*Pattern 1 is the default*

## Cleaning the Beacon

**⚠ WARNING**

***CRAZING/CRACKING*** *Crazing (fine cracks) of lenses causes reduced effectiveness of the light. Do not use cleaning agents (which causes crazing) such as strong detergents, solvents, or petroleum products. If crazing of the lenses does occur, the reliability of light for emergency signaling purposes may be reduced until the lenses are replaced.*

**NOTICE**

***CLEANING the POLYCARBONATE LENSES:*** *To extend the life of this device, periodic cleaning is necessary. Clean the lens with a mild, non-abrasive, neutral-pH cleaning agent and a soft, clean cloth. Rinse the device thoroughly to ensure that no cleaning agent residue remains. To avoid water spots, dry the device with a soft clean cloth. Failure to follow this precaution can cause crazing or cracking of the lens/dome and voids the warranty claims for the light.*

## Getting Technical Support

For technical support, please contact:

Federal Signal Corporation

Phone: 1-800-443-9132

Fax: 1-800-343-9706

Email: [empserviceinfo@fedsig.com](mailto:empserviceinfo@fedsig.com)

## **Getting Repair Service**

---

### **Getting Repair Service**

The Federal Signal factory provides technical assistance with

Any units returned to returned to Federal Signal for service, inspection, or repair must be accompanied by a Return Material Authorization (RMA). Obtain an RMA from a Local Distributor or Manufacturer's Representative. Provided a brief explanation of the service requested or the nature of the malfunction.

Address all communications to the following address.

Federal Signal Corporation  
Service Department  
2645 Federal Signal Drive  
University Park IL 60484-3167



## **FEDERAL SIGNAL** Safety and Security Systems

2645 Federal Signal Drive  
University Park, Illinois 60484

[www.fedsig.com](http://www.fedsig.com)

Customer Support

Police/Fire-EMS:

800-264-3578 • +1 708 534-3400

Work Truck:

800-824-0254 • +1 708 534-3400

Technical Support

800-433-9132 • +1 708 534-3400